


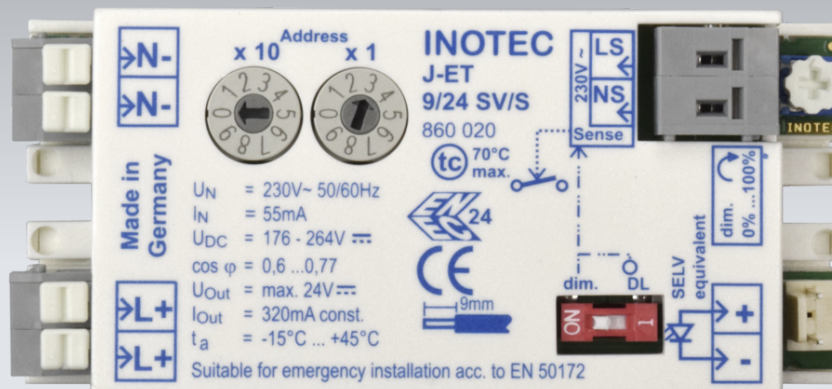

LED-driver with integrated individual lamp monitoring for stand-by and continuous lighting without separate BUS-line. Complying with international standards for safety and working, electromagnetic compatibility and interference resistance. The LED output can be dimmed in two steps during mains operation. For connection to JOKER-central battery systems.

Luminaire with integrated 230V switch input for switched maintained operation or local phase monitoring function.

Replaceable power supply unit for easier maintenance and servicing.

Technical details

Material	polycarbonate
Protection category	IP20
Permitted temperature range	-15...+45 °C
Nominal voltage AC	230V AC/DC $\pm 10\%$ 50/60 Hz
Input terminal	max. 2.5 mm ² single-core or max. 1.5mm ² multi-core with ferrule
Nominal voltage DC	176 - 264 V
Dim.	Length x Width x Height: 40 mm x 90 mm x 30 mm
Type of current	constant current
max connection capacity	7.6 W
Output current	320 mA