
NE-ET 9/24 SVmax.24VDC,320mAconst

Art. no.: 101420570



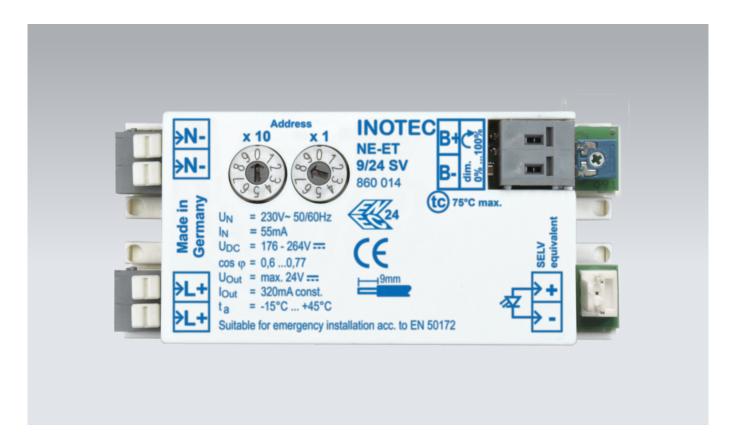

LED-driver with integrated individual lamp monitoring for non-maintained, maintained lighting with seperate BUS-line. Permanent monitoring of maintained luminaires. In case of an interruption of the data line the luminaires are turned on independent of the operating status! Complying with international standards for safety and working, electromagnetic compatibility and interference resistance for high function safety. LED output dimmable continuously in mains operation. For connection to INOTEC-NEA-monitoring systems.

Technical details

B# - (- 2 - 1	
Material	polycarbonate
Protection category	IP20
Permitted temperature range	-15+45 °C
Input terminal	max. 2.5 mm² single-core or max. 1.5mm² multi-core with ferrule
Nominal voltage AC	230V AC ±10% 50/60 Hz
Output current	320 mA
Type of current	constant current
max connection capacity	7.6 W
Dim.	Length x Width x Height: 40 mm x 90 mm x 28 mm