FL 6110 Wall, floor and stair luminaire

for connection to CP D.E.R. 230V

INOTEC Sicherheitstechnik GmbH

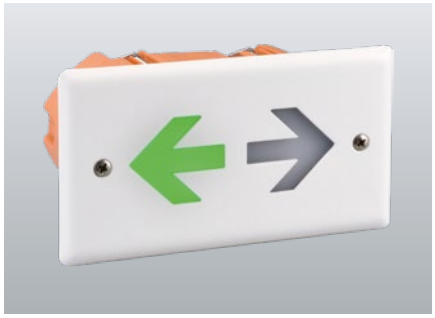

Low level recessed wall installation luminaire for dynamic indication of the safe escape route depending on the smoke spreading during a fire. Luminaire with powder-coated metal cover for installation in double wall box for concrete, cavity wall or in-wall.

Technical data

Material:	sheet steel powder-coated
Illuminant:	replaceable LED-module
Nominal voltage AC:	230V ±10% 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	16 mA
Nominal current DC:	14 mA

Apparent power:	3,7 VA
Effective power:	4,1 W
Inrush current:	6 A / 22 µs
Protection class:	I
Input terminals:	2.5mm² feed through wiring
Temperature ta:	-15...+40 °C

Articles

FL 6110 CLDD 230V		
Colors	RAL 9016	RAL (special)
Art. no.	101829586	101829687

recessed wall mounting

Protection category: IP40



Name	**Accessories**	**Art. no.**
32 WL-SMTW 1500MCD/20MA GRÜNKB 60MM	spare part	092405
CLDD 230/8-CC-125-300-C		860050