




FL 6110 Wall, floor and stair luminaire

for connection to CP D.E.R. 230V

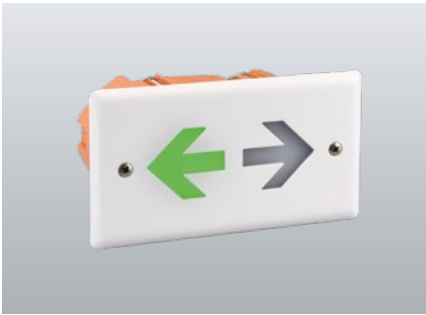

Low level recessed wall installation luminaire for dynamic indication of the safe escape route depending on the smoke spreading during a fire. Luminaire with powder-coated metal cover for installation in double wall box for concrete, cavity wall or in-wall.

Technical data

Material:	sheet steel powder-coated	Apparent power:	3,7 VA
Illuminant:	LED-module	Effective power:	4,1 W
Nominal voltage AC:	230V ±10% 50/60 Hz	Inrush current:	6 A / 22 µs
Nominal voltage DC:	176 - 264 V	Protection class:	I
Nominal current AC:	16 mA	Input terminals:	2.5mm ² feed through wiring
Nominal current DC:	14 mA	Temperature ta:	-15...+40 °C

Articles

FL 6110 CLDD 230V			Name	Accessories	Art. no.
Colors	RAL 9016	RAL (special)	32 WL-SMTW 1500MCD/20MA GRÜNKB 60MM	Ersatzteil	092405
Art. no.	101829586	101829687	CLDD 230/8-CC-125-300-C		860050

recessed wall mounting

Protection category:
IP40

