

**230V****SN/A 6200 SQ** Wall, floor and stair luminaires**J/SV**

For connection to JOKER-central battery systems



LED outdoor luminaire for safety and/or general lighting. Robust die-cast aluminium housing with weatherproof powder coating, high IP65 protection and impact resistance IK10.

**Technical data**


<b>Material:</b>	die-cast aluminum
<b>Illuminant:</b>	10 x 0,2W + 18 x 0,3W LED-module
<b>Luminous flux:</b>	194 lm
<b>Nominal voltage AC:</b>	230V ±10% 50/60 Hz
<b>Nominal voltage DC:</b>	176 - 264 V
<b>Nominal current AC:</b>	22 mA
<b>Nominal current DC:</b>	17 mA

<b>Apparent power:</b>	5,1 VA
<b>Effective power:</b>	4,0 W
<b>Inrush current:</b>	6 A / 98 µs
<b>Protection class:</b>	I
<b>Input terminals:</b>	2.5mm <sup>2</sup> feed through wiring
<b>Temperature ta:</b>	-15...+40 °C
<b>Impact resistance:</b>	IK10

**Technical data (General lighting)**

<b>Nominal voltage AC:</b>	230V AC/DC ±10% 50/60 Hz
<b>Apparent power:</b>	10,4 VA
<b>Leistung (Allgemeinlicht):</b>	7,2 W

<b>Light colour:</b>	4000 K
<b>Luminous flux:</b>	549 lm
<b>inrush current:</b>	8 A / 50 µs

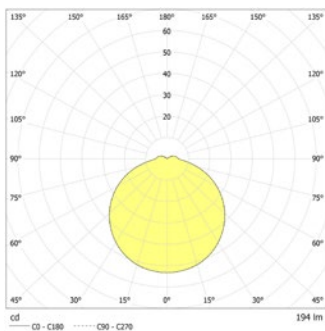

Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

Distance to middle of escape route [m]	2.5	3.2	8.3
2.5	3.0	3.3	8.7
4.0	3.2	9.2	
5.0	2.8	9.3	
6.0	1.8	8.9	


Wall mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

Distance to middle of escape route [m]	1.0m		2.0m	
	2.0	2.1	6.0	6.5
2.5	2.2	6.1	6.7	2.3
3.0	1.4	6.0	6.8	2.0

**Articles****SN/A 6200 LED J/SV square**


Colors	RAL 7024	RAL 9003
Art. no.	101279417	101279316

wall or ceiling mounting    Light colour: 3000 K    Protection category: IP65

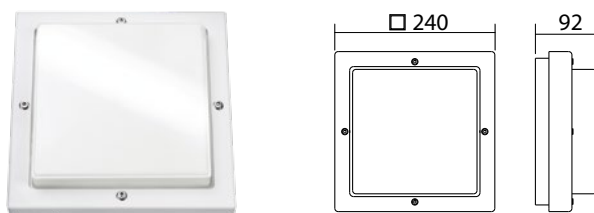**SN/A 6200 LED J/SV square**

Colors	RAL 7024	RAL 9003
Art. no.	101279215	101279114

wall or ceiling mounting    Light colour: 4000 K    Protection category: IP65

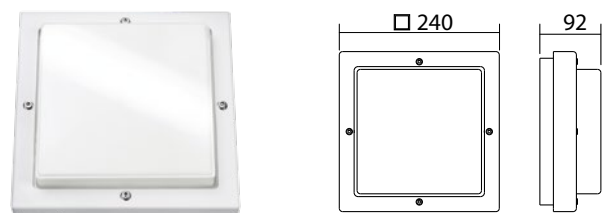

Name	Accessories	Art. no.
J-ET 5.1 SV-max. 24V DC320mA const.	Ersatzteil	101422893