
SN/A 6308 Wall, floor and stair luminaires

For connection to JOKER-central battery systems

INOTEC
Sicherheitstechnik GmbH

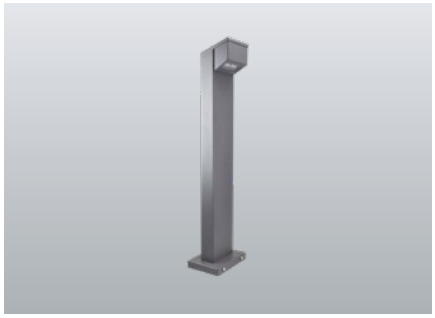

Combined bollard safety luminaire optimised for the illumination of escape routes in outdoor areas. Luminaires made of high-quality, powder-coated aluminium with a high protection category.

Technical data


Material:	aluminium powder-coated
Illuminant:	replaceable 1 x 3,5W LED-module
Luminous flux:	340 lm
Nominal voltage AC:	230V ±10% 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	33 mA
Nominal current DC:	25 mA

Apparent power:	7,6 VA
Effective power:	5,7 W
Inrush current:	8 A / 50 µs
Protection class:	II
Input terminals:	2.5mm² feed through wiring
Temperature ta:	-15...+40 °C

Technical data (General lighting)

Nominal voltage AC:	230V AC/DC ±10% 50/60 Hz
Apparent power:	7,6 VA
Light colour:	3000 K, 4000 K

Luminous flux:	654 lm
inrush current:	8 A / 50 µs



Wall mounting: Minimum illumination 1.0lx
Maintenance factor 0.8

	Distance to middle of escape route 1.0m	
1.0	3.5	9.2

Articles

SN/A 6308 LED J/SV		
Colors	RAL 7015	RAL (special)
Art. no.	101281033	101281134

floor installation | Light colour: 3000 K | Protection category: IP54



SN/A 6308 LED J/SV		
Colors	RAL 7015	RAL (special)
Art. no.	101281235	101281336

floor installation | Light colour: 4000 K | Protection category: IP54




INOTEC
Sicherheitstechnik GmbH

ground element bollard console

Art. no. 101080565





Name	Accessories	Art. no.
J-ET 9/24 SVmax.24VDC,320mAconst	spare part	101420267
LM 6308 2/3K ALB KB80 LED Modul	spare part	104576104
LM 6308 2/4K ALB KB80 LED Modul	spare part	104576205
ground element bollard console	optional	101080565