



Combined wall or ceiling luminaire for general and safety lighting.

**Technical data**


<b>Material:</b>	polycarbonate
<b>Illuminant:</b>	replaceable 12 x 0,3W + 70 x 0,3W LED-module
<b>Luminous flux:</b>	461 lm
<b>Nominal voltage AC:</b>	230V ±10% 50/60 Hz
<b>Nominal voltage DC:</b>	176 - 264 V
<b>Nominal current AC:</b>	28 mA
<b>Nominal current DC:</b>	27 mA

<b>Apparent power:</b>	6,5 VA
<b>Effective power:</b>	6,2 W
<b>Inrush current:</b>	6 A / 22 µs
<b>Protection class:</b>	I
<b>Input terminals:</b>	2.5mm <sup>2</sup> feed through wiring
<b>Temperature ta:</b>	-15...+30 °C
<b>Impact resistance:</b>	IK06

**Technical data (General lighting)**

<b>Nominal voltage AC:</b>	230V AC/DC ±10% 50/60 Hz
<b>Apparent power:</b>	33,0 VA
<b>Effective power:</b>	32,0 W

<b>Light colour:</b>	3000 K, 4000 K
<b>Luminous flux:</b>	3028 lm
<b>inrush current:</b>	18 A / 216 µs

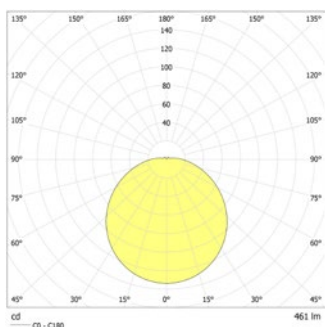

Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

Distance to middle of escape route (m)	3000 K	4000 K
2.0	3.9	9.7
3.0	4.6	11.5
4.0	4.9	12.7
5.0	5.0	13.5
6.0	5.0	14.1
7.0	4.7	14.3
8.0	4.2	14.3
9.0	3.4	13.9
10.0	1.8	13.3


Wall mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

Distance to middle of escape route (m)	3000 K		4000 K	
	1.0m	2.0m	1.0m	2.0m
2.0	2.7	7.3	3.3	
2.5	2.6	7.3	3.3	
3.0	2.4	7.2	3.2	

**Articles**


SN/A 8627 FLD 230V	
Colors	RAL 9010
Art. no.	101382275

wall or ceiling mounting    Light colour: 3000 K    Protection category: IP40

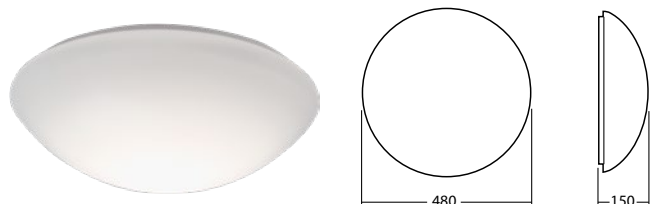

SN/A 8627 FLD 230V	
Colors	RAL 9010
Art. no.	101382174

wall or ceiling mounting    Light colour: 4000 K    Protection category: IP40

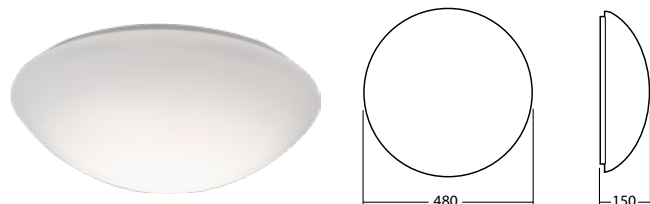

Name	Accessories	Art. no.
Cover 8627	spare part	050308
FLD 230/8 – CC – 650 – C	spare part	100903440
LED driver replacement SN 8627	spare part	101861417
LED replacement kit 3K AV/SV SN 8627	spare part	101861518
LED replacement kit 4K AV/SV SN 8627	spare part	101861619
motion detector-unit smartSWITCH	optional	101435223

## Info:

PO:



PR:



PU:



PL:



PRO:



PRU:



PLU:



PLO:

