



Wand- oder Deckenleuchte für Allgemein- und Sicherheitsbeleuchtung.

Technical data


Material:	polycarbonate
Illuminant:	12 x 0,3W + 70 x 0,3W LED-module
Luminous flux:	424 lm
Nominal voltage AC:	230V ±10% 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	28 mA
Nominal current DC:	27 mA

Apparent power:	6,5 VA
Effective power:	6,2 W
Inrush current:	6 A / 22 µs
Protection class:	I
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+30 °C
Impact resistance:	IK04

Technical data (General lighting)

Nominal voltage AC:	230V AC/DC ±10% 50/60 Hz
Apparent power:	33,0 VA
Leistung (Allgemeinlicht):	32,0 W

Light colour:	3000 K, 4000 K
Luminous flux:	2957 lm
inrush current:	18 A / 216 µs



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

	2.0	4.0	9.2
	3.0	4.4	11.4
	4.0	4.8	12.6
	5.0	4.9	13.3
	6.0	4.8	13.8
	7.0	4.5	13.9
	8.0	3.9	13.8
	9.0	2.8	13.4


Wall mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

		Distance to middle of escape route			
		1.0m		2.0m	
	2.0	2.9	7.4	3.4	8.8
	2.5	2.8	7.4	3.4	8.9
	3.0	2.6	7.3	3.3	8.9

Articles


SN/A 8727 FLD 230V	
Colors	RAL 9010
Art. no.	101382477

wall or ceiling mounting Light colour: 3000 K Protection category: IP40

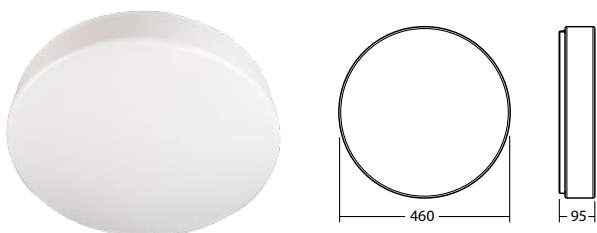

SN/A 8727 FLD 230V	
Colors	RAL 9010
Art. no.	101382376

wall or ceiling mounting Light colour: 4000 K Protection category: IP40

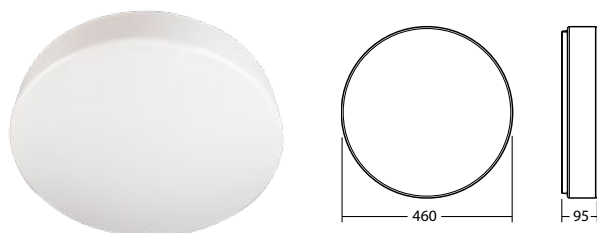

Name	Accessories	Art. no.
	Ersatzteil	undefined
FLD 230/8 – CC – 650 – C	Ersatzteil	100903440
LED driver replacement SN 8627	Ersatzteil	101861417
LED replacement kit 3K AV/SV SN 8627	Ersatzteil	101861518
LED replacement kit 4K AV/SV SN 8627	Ersatzteil	101861619
motion detector-unit smartSWITCH	optional	101435223