



LED-Rettungszeichen-Scheibenleuchte mit rahmenloser, freihängender Piktogrammscheibe. Homogene Piktogrammausleuchtung durch moderne Lichtleiter-Technologie. Piktogramm um 90° drehbar. Geräteträger VL2TM 13-pol. für RIDI LINIA EVO-Tragschiene. Einfaches Einclippen mit Hilfe der werkzeuglos zu betätigenden Rastverschlüsse zur elektrischen Kontaktierung inkl. Stromkreisauswahl und mechanischen Befestigung.

Technical data


viewing distance:	20 m	Apparent power:	4,0 VA
Illuminant:	12 x 0,1W LED-module	Effective power:	3,2 W
Nominal voltage AC:	230V ±10% 50/60 Hz	Inrush current:	6 A / 98 µs
Nominal voltage DC:	176 - 264 V	Input terminals:	2.5mm ² feed through wiring
Nominal current AC:	17 mA	Temperature ta:	-15...+40 °C
Nominal current DC:	14 mA		

Articles

SNP 1020 LED J/SV

Colors	RAL 9006	RAL 9016
Art. no.	104936014	104875083


for installation in RIDI LINIA Light colour: 6500 K Protection category: IP20

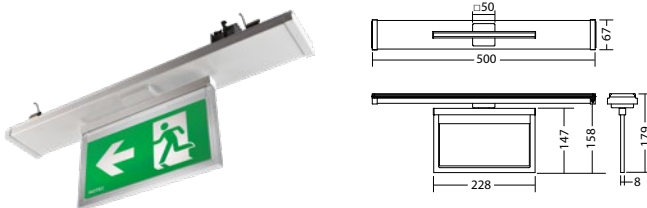

SNP 1020 LED J/SV

Colors	RAL 9006	RAL 9016
Art. no.	104936014	104875083

for installation in RIDI LINIA Light colour: 6500 K Protection category: IP20

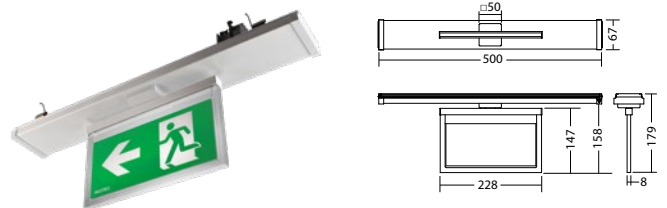

Name	Accessories	Art. no.
Blind cover SNP 1020, white	required	101856060
J-ET 5.1 SV-max. 24V DC320mA const.	spare part	101422893
Legend panel SNP 1020, PL	required	101856262
Legend panel SNP 1020, PLO	required	101856666
Legend panel SNP 1020, PLU	required	101856565
Legend panel SNP 1020, PO	required	101856464
Legend panel SNP 1020, PR	required	101856363
Legend panel SNP 1020, PRO	required	101856868
Legend panel SNP 1020, PRU	required	101856767
Legend panel SNP 1020, PU	required	101856161

Info:

