



Straight-Line high quality emergency exit luminaires, made of powder coated aluminium profile of just 14.5mm thickness. Slim design and brilliant illumination by cutting-edge fibre optics technology with a luminance of $>500\text{cd/m}^2$.

Technical data

viewing distance:	20 m
Material:	aluminium powder-coated
Illuminant:	12 x 0,1W LED-module
Nominal voltage DC:	24 V $\pm 20\%$ 24 V $\pm 25\%$
Nominal current DC:	70 mA

Effective power:	1,7 W
Protection class:	III
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+40 °C

Articles

SNP 1520.1 D/WA LED 24V

Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	100825840	100825739	100825941


wall bracket or ceiling mounting Light colour: 6500 K Protection category: IP40



SNP 1520.1 E LED 24V

Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	101347317	101347216	101347418


recessed ceiling mounting Light colour: 6500 K Protection category: IP40

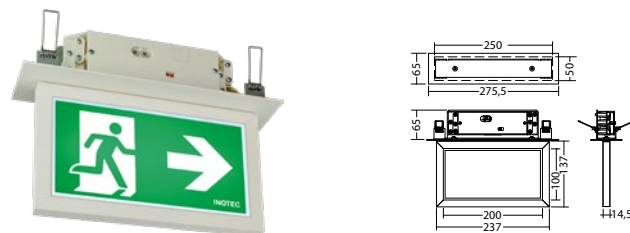

SNP 1520.1 ES LED 24V

Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	101347620	101347519	101875359

recessed cable suspension Light colour: 6500 K Protection category: IP40

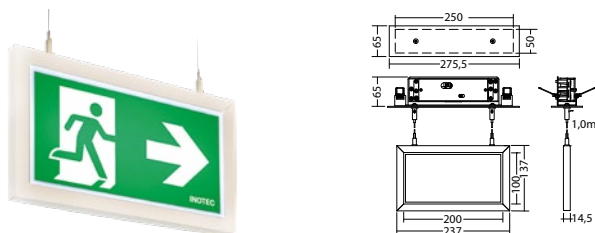

SNP 1520.1 P LED 24V

Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	101346711	101346610	101346812


pendulum mounting Light colour: 6500 K Protection category: IP40



SNP 1520.1 PM LED 24V

Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	100825537	100825436	100825638


parallel wall mounting Light colour: 6500 K Protection category: IP40

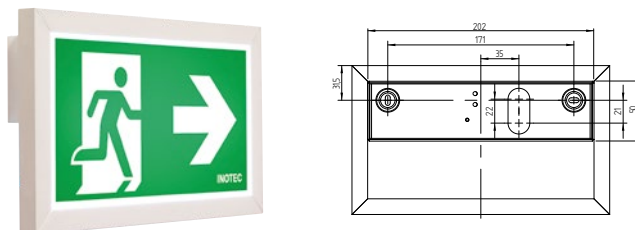

SNP 1520.1 S LED 24V

Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	100826143	100826042	100826244


cable suspension mounting Light colour: 6500 K Protection category: IP40

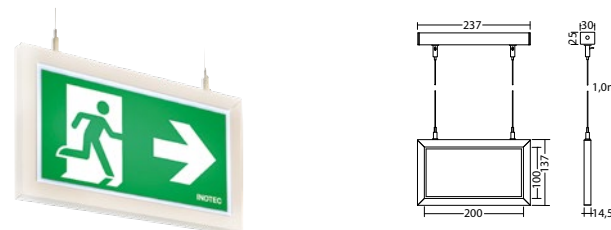

SNP 1520.1 WE LED 24V

Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	101347014	101346913	101347115

recessed wall mounting Light colour: 6500 K Protection category:
IP40



Name	Accessories	Art. no.
		undefined
Blind cover 1520	required	100680542
ILD 24/4-CC-200-C	spare part	101425119
ILD-Supply 24/4-CC-200 UP	required	104892059
L-JET 2 - max. 24V DC 180mAconst	spare part	101422085
L-JET 2 LOF max. 24V180mA const.		094235
L-JET 2 LOF max. 24V180mA const.		094235
L-JET 2 LOF max. 24V180mA const.	spare part	094235
LM 1520.1 D/P/S/ES/WA/LINE E 12/6,5K RAL9016 LED Modul	spare part	104794251
LM 1520.1 PM 12/6,5K 24V RAL9016 LED Modul	spare part	104789403
LM 1520.1 WE 12/6,5K 24V RAL9016 LED Modul	spare part	104794857
Legend panel 1520 PLO	required	101222530
Legend panel 1520 PRO	required	101222631
Legend panel SNP 1520 custom design	required	101224146
Legend panel for 1520 PL	required	100699235

Info: When ordering an exit luminaire, the required pictogram with the corresponding arrow direction must be indicated.



Name	Accessories	Art. no.
Legend panel for 1520 PL - vertical	required	100699841
Legend panel for 1520 PL, without logo	required	101220712
Legend panel for 1520 PLU	required	101222126
Legend panel for 1520 PO	required	101222025
Legend panel for 1520 PO, w/o logo	required	101221924
Legend panel for 1520 PR	required	100699336
Legend panel for 1520 PR - vertical	required	100699942
Legend panel for 1520 PR cantil, w/o logo	required	101221419
Legend panel for 1520 PR, without logo	required	101220813
Legend panel for 1520 PRU	required	101222227
Legend panel for 1520 PU	required	100699437
Legend panel for 1520 PU - vertical	required	100700043
Legend panel for 1520 PU cantil, w/o logo	required	101221520
Legend panel for 1520 PU, without logo	required	101220914
Legendpanel for 1520 PL cantil, w/o logo	required	101221318
Wireset 3m, SNP 101x,10x0,121x,15x0,72xx	optional	102384005
Wireset 5m, SNP 101x,10x0,121x,15x0,72xx	optional	102384106