

230V**SNP 1530.1 Straight-Line****J/SV**

For connection to JOKER-central battery systems



Straight-Line high quality emergency exit luminaires, made of powder coated aluminium profile of just 14.5mm thickness. Slim design and brilliant illumination by cutting-edge fibre optics technology with a luminance of >500cd/m².

Technical data

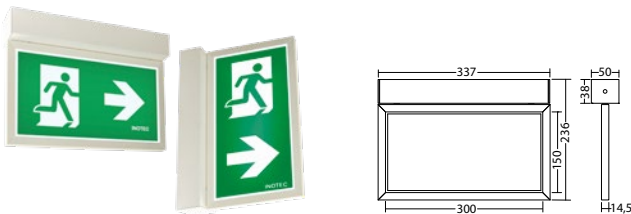
viewing distance:	30 m
Material:	aluminium powder-coated
illuminant:	18 x 0,1W LED-module
Nominal voltage AC:	230V ±10% 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	23 mA
Nominal current DC:	18 mA

Apparent power:	5,2 VA
Effective power:	4,3 W
Inrush current:	8 A / 50 µs
Protection class:	I
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+40 °C

Articles**SNP 1530.1 D/WA LED J/SV**

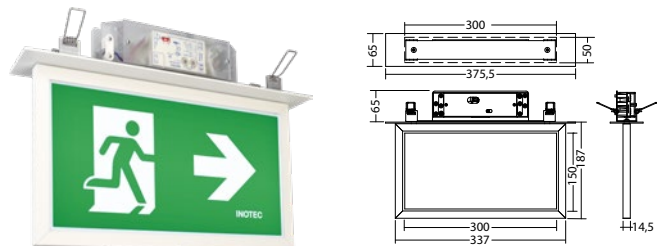
Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	101253448	101253347	101253549

wall bracket or ceiling mounting Light colour: 6500 K Protection category: IP40

**SNP 1530.1 E LED J/SV**

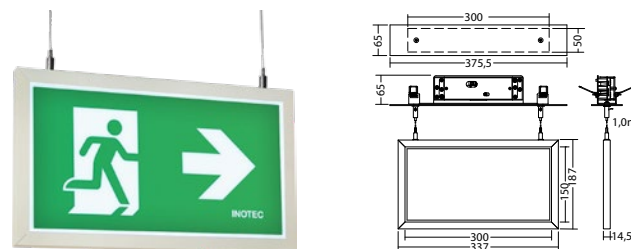
Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	101255569	101255468	101255670

recessed ceiling mounting Light colour: 6500 K Protection category: IP40

**SNP 1530.1 ES LED J/SV**

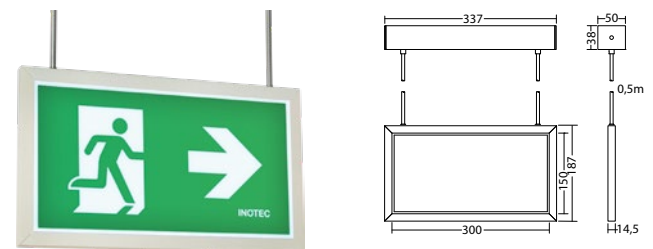
Colors	RAL 9016
Art. no.	101256074

recessed cable suspension Light colour: 6500 K Protection category: IP40

**SNP 1530.1 P LED J/SV**

Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	101254660	101254559	101254761

pendulum mounting Light colour: 6500 K Protection category: IP40



230V

SNP 1530.1 Straight-Line

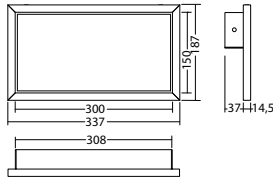
J/SV

For connection to JOKER-central battery systems

SNP 1530.1 PM LED J/SV

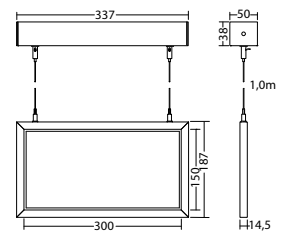
Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	101252842	101252741	101252943

parallel wall mounting Light colour: 6500 K Protection category: IP40

**SNP 1530.1 S LED J/SV**

Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	101254054	101253953	101254155

cable suspension mounting Light colour: 6500 K Protection category: IP40



Name	Accessories	Art. no.
		undefined
Blind cover 1530	required	100680643
J - ET 9 / 24 SV -max.24VDC,320mAconst	Ersatzteil	101420267
Legend panel 1530 PLO	required	101219294
Legend panel 1530 PLU	required	101222328
Legend panel 1530 PO	required	101219496
Legend panel 1530 PRO	required	101219395
Legend panel 1530 PRU	required	101222429
Legend panel SNP 1530 custom design	required	101224247
Legend panel for 1530 PL	required	100699538
Legend panel for 1530 PL - vertical	required	100700144
Legend panel for 1530 PL cantil, w/o logo	required	101221621
Legend panel for 1530 PL, without logo	required	101221015
Legend panel for 1530 PR	required	100699639
Legend panel for 1530 PR - vertical	required	101220510
Legend panel for 1530 PR cantil, w/o logo	required	101221722
Legend panel for 1530 PR, without logo	required	101221116
Legend panel for 1530 PU	required	100699740
Legend panel for 1530 PU - vertical	required	101220611
Legend panel for 1530 PU cantil, w/o logo	required	101221823
Legend panel for 1530 PU, without logo	required	101221217
Wireset 3m, SNP 101x,10x0,121x,15x0,72xx	optional	102384005
Wireset 5m, SNP 101x,10x0,121x,15x0,72xx	optional	102384106

Info: When ordering an exit luminaire, the required pictogram with the corresponding arrow direction must be indicated.

