


230V

SNP 2460 Four sided exit luminaires

For connection to FUSION central battery- or emergency power (NEA) systems

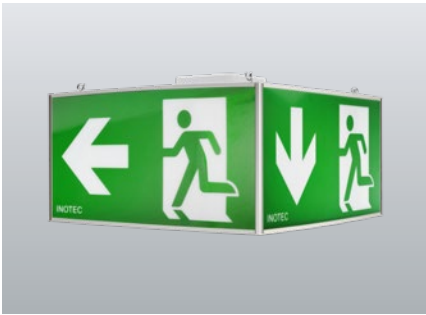

Four-sided emergency exit sign luminaire with high viewing distance and anodized aluminium corner profil. Luminaire body with pictograms prepared for suspended ceiling mounting with luminaire unit fitted from above. Homogeneous pictogram illumination thanks to optimised LED technology and individually replaceable pictograms on each luminaire side.

Technical data

viewing distance:	60 m
Material:	aluminium powder-coated
illuminant:	1 x 8W LED-module
Nominal voltage AC:	230V ±10% 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	46 mA
Nominal current DC:	49 mA


Apparent power:	10,6 VA
Effective power:	10,5 W
Inrush current:	6 A / 22 µs
Protection class:	II
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+40 °C

Articles

SNP 2460 K FLD 230V	
Colors	-
Art. no.	102309233

chain mounting

Light colour: 4000 K

Protection category:
IP54

Name	Accessories	Art. no.
Blindscheibe 7x60 grün	required	714668
Cover 2460 S w/o pictograms	required	102369251
FLD 230/8 – CC – 650 – C	Ersatzteil	100903440
Haube 2460 K PL/PO/PR/leer,komplett	required	104574383
Haube 2460 K PL/PU/PR/leer,komplett	required	104582164
LM 2460 1(12V)/6,5K KB150	Ersatzteil	104439593
Legend panel 7x60 PL	required	101950232
Legend panel 7x60 PO	required	101950030
Legend panel 7x60 PR	required	101950131
Legend panel 7x60 PU	required	101950333
Legend panel 7x60 custom design	required	101871218
Seilset 10m, SNP 2460, Seilabhängung inkl. Zubehör	optional	104575801

Info: When ordering an exit luminaire, the required pictogram with the corresponding arrow direction must be indicated.

