




Single-sided exit sign luminaire made of high-quality aluminum profile. Especially flat design and an efficient and homogeneous illumination of the pictogram, using modern light guide technology. For easy and flexible installation, the cable entry is possible from the rear and from the side.

Incl. INOTEC Spot-Light 2 for illumination of highlighted areas.



Technical data

viewing distance:	20 m	Apparent power:	5,8 VA
Material:	aluminium	Effective power:	3,6 W
Illuminant:	12 x 0,1W + 1 x 1W LED-module	Inrush current:	6 A / 34 µs
Nominal voltage AC:	230V ±10% 50/60 Hz	Protection class:	I
Nominal voltage DC:	176 - 264 V	Input terminals:	2.5mm² feed through wiring
Nominal current AC:	25 mA	Temperature ta:	-15...+40 °C
Nominal current DC:	16 mA		

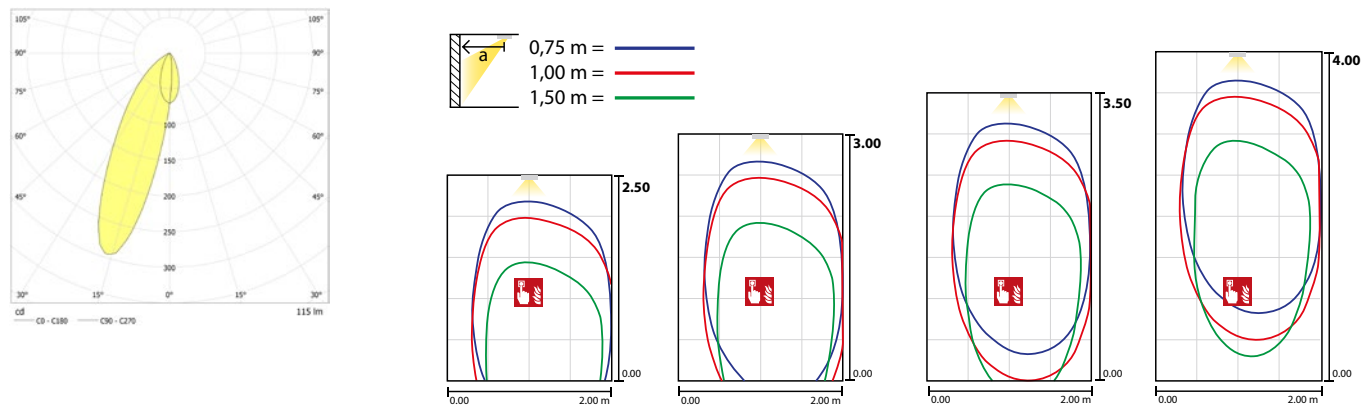

Articles

SNP 7120 -03 AS2 FLD 230V		
Colors	Aluminium	RAL (special)
Art. no.	102363591	104674013

wall mounting Light colour: 6500 K Protection category: IP40



Name	Accessories	Art. no.
FLD 230/4 - CC - 320 - L	spare part	101965083
Legend 7x20 em window with escape ladder	required	101950434
Legend panel 7x20 PL	required	101947404
Legend panel 7x20 PLO	required	101946996
Legend panel 7x20 PLU	required	101947101
Legend panel 7x20 PO	required	101947202
Legend panel 7x20 PR	required	101947303
Legend panel 7x20 PRO	required	101946895
Legend panel 7x20 PRU	required	101947000
Legend panel 7x20 PU	required	101947505
Legend panel 7x20 custom design	required	101870915
Legend panel 7x20 emergency window	required	101950636
Legend panel 7x20 fire extinguisher	required	102044909
Legend panel 7x20 rescue window	required	101950535
Spare part - LED unit SNP 7120-03AS	LEDs	101969228

Info: When ordering an exit luminaire, the required pictogram with the corresponding arrow direction must be indicated.

PO: PR: PU: PL: PRO: PRU: PLU: PLO: