



Double-sided aluminium profile emergency exit luminaires with additional light output at bottom side. Homogeneous illumination by state-of-the-art LED technology with a luminance of  $> 500 \text{ cd/m}^2$ .

### Technical data

<b>Viewing distance:</b>	60 m	<b>Nominal current DC:</b>	400 mA
<b>Material:</b>	Aluminium	<b>Protection class:</b>	III
<b>Illuminant:</b>	8 x 1W LED-module	<b>Input terminals:</b>	2.5mm <sup>2</sup> feed through wiring
<b>Nominal voltage DC:</b>	24 V $\pm$ 20 %	<b>Temperature ta:</b>	-15...+40 °C


**Available colours** Add colour code to the article no. e.g. 800 014 LXX

Special colour: L99

### Articles


#### SNP 7283 D LED 24V Art. no. 810 153

Ceiling mounting Light colour: 6500 K Protection category: IP40

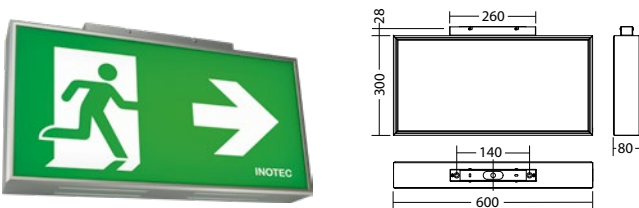


#### SNP 7283 K LED 24V Art. no. 810 156

Chain mounting Light colour: 6500 K Protection category: IP40

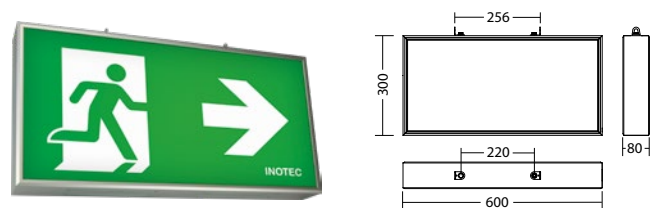


#### SNP 7283 P LED 24V Art. no. 810 155

Pendulum mounting Light colour: 6500 K Protection category: IP40

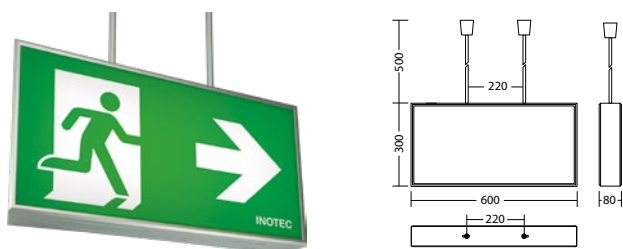


#### SNP 7283 S LED 24V Art. no. 810 184

Cable suspension mounting Light colour: 6500 K Protection category: IP40

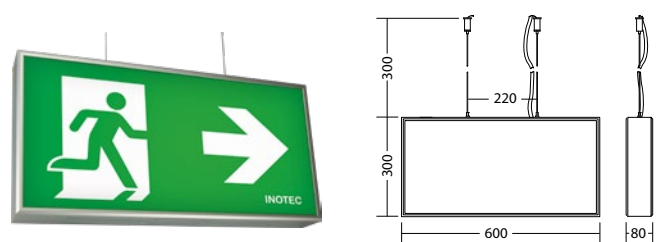

#### SNP 7283 WA LED 24V Art. no. 810 154

Wall bracket mounting Light colour: 6500 K Protection category: IP40

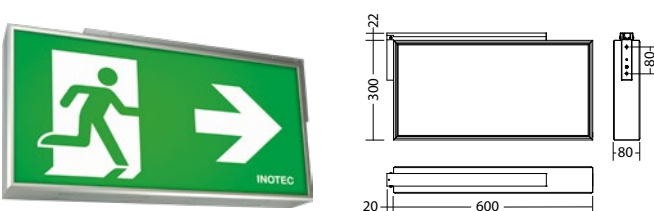

Name	Accessories	Art. no.
Pendulum set SN-luminaire 24 V 2,0 m gr	required	890 545
Pendulum set SN-luminaire 24 V 2,0 m ws	required	890 544
Pendulum set SN-luminaire 24 V 1,0 m gr	required	890 543
Pendulum set SN-luminaire 24 V 1,0 m ws	required	890 542
Pendulum set SN-luminaire 24 V 0,5 m gr	required	890 541
Pendulum set SN-luminaire 24 V 0,5 m ws	required	890 540
Legend panel 7x83 PRO	required	714 356
Legend panel 7x83 PLO	required	714 355
Legend panel 7x83 PRU	required	714 354
Legend panel 7x83 PLU	required	714 353
Legend panel 7x83 PU	required	714 055
Legend panel 7x83 PR	required	714 054
Legend panel 7x83 PL	required	714 053
Blind cover 7x83 white	required	704 955
Blind cover 7x83 grey	required	704 925

**Info:** When ordering an exit luminaire, the required pictogram with the corresponding arrow direction must be indicated.

For luminaires with pendulum mounting, select the desired pendulum (length and colour of baldachin).

