


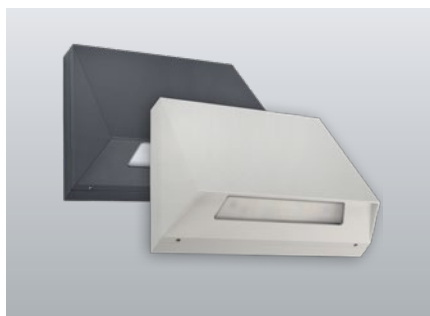


Luminaire with targeted light output. Robust trapezoidal luminaire housing for wall mounting made of powder-coated die-cast aluminium. High protection rating for outdoor installation. And optional cable entry at the side.

Technical data

Material:	die-cast aluminum powder-coated
Illuminant:	18 x 0,15W LED-module
Luminous flux:	379 lm
Nominal voltage AC:	230V ±10% 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	34 mA
Nominal current DC:	22 mA

Apparent power:	7,8 VA
Effective power:	5,0 W
Inrush current:	6 A / 34 µs
Protection class:	I
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+40 °C
Impact resistance:	IK09



Wall mounting: Minimum illumination 1.0lx

	Distance to middle of escape route			Distance to middle of escape route			Distance to middle of escape route		
	1.0m			2.0m			3.0m		
1.0	2.6	6.3	2.4	6.1	1.1	4.7			
1.5	3.2	7.7	3.1	7.7	2.5	7.0			
2.0	3.6	8.8	3.6	8.9	3.2	8.5			
2.5	4.0	9.7	4.0	9.9	3.7	9.6			
3.0	4.3	10.5	4.3	10.7	4.2	10.5			
3.5	4.5	11.1	4.5	11.4	4.3	11.2			
4.0	4.6	11.7	4.7	12.0	4.5	11.9			
4.5	4.8	12.2	4.8	12.5	4.7	12.4			
5.0	4.8	12.6	4.9	12.9	4.8	12.9			
5.5	4.9	12.9	5.0	13.2	4.8	13.2			
6.0	4.9	13.1	5.0	13.5	4.9	13.5			

Articles

SN 6201 -03 FLD 230V


Colors DB 703 HWF 7015 RAL 7015 RAL 9016 HWF 9016 HWF (special)

Art. no. 104358862 104359064 104358660 104358559 104358963 104359165

wall mounting


Light colour: 4000 K

Protection category:
IP65



mounting adapter 6201 RAL 7015

Art. no. 104575292



Name	Accessories	Art. no.
FLD 230/4 - CC - 320 - L	spare part	101965083
LM 176x20 18/4K KL LED Modul	spare part	104412012
mounting adapter 6201 RAL 7015	optional	104575292