



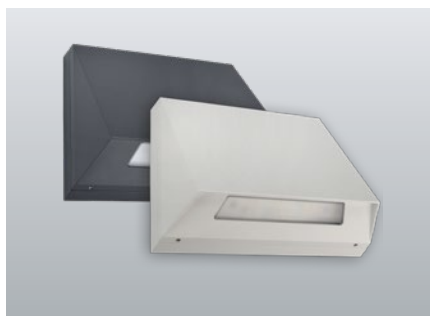

Luminaire with targeted light output. Robust trapezoidal luminaire housing for wall mounting made of powder-coated die-cast aluminium. High protection rating for outdoor installation. And optional cable entry at the side.

Technical data

Material:	die-cast aluminum powder-coated	Effective power:	4,2 W
Illuminant:	18 x 0,15W LED-module	Protection class:	III
Luminous flux:	379 lm	Input terminals:	2.5mm ² feed through wiring
Nominal voltage DC:	24 V ±25 %	Temperature ta:	-15...+40 °C
Nominal current DC:	175 mA	Impact resistance:	IK09



Wall mounting: Minimum illumination 1.0lx

	Distance to middle of escape route					
	1.0m		2.0m		3.0m	
1.0	2.6	6.3	2.4	6.1	1.1	4.7
1.5	3.2	7.7	3.1	7.7	2.5	7.0
2.0	3.6	8.8	3.6	8.9	3.2	8.5
2.5	4.0	9.7	4.0	9.9	3.7	9.6
3.0	4.3	10.5	4.3	10.7	4.2	10.5
3.5	4.5	11.1	4.5	11.4	4.3	11.2
4.0	4.6	11.7	4.7	12.0	4.5	11.9
4.5	4.8	12.2	4.8	12.5	4.7	12.4
5.0	4.8	12.6	4.9	12.9	4.8	12.9
5.5	4.9	12.9	5.0	13.2	4.8	13.2
6.0	4.9	13.1	5.0	13.5	4.9	13.5

Articles


SN 6201 -03 LED 24V

Colors	DB 703	HWF 7015	RAL 7015	RAL 9016	HWF 9016	HWF (special)
Art. no.	104357448	104357650	104357246	104357145	104357549	104357751

wall mounting


Light colour: 4000 K

Protection category:
IP65



mounting adapter 6201 RAL 7015

Art. no. 104575292



Name	Accessories	Art. no.
ILD 24/4-CC-320-C	spare part	101425321
LM 176x20 18/4K KL LED Modul	spare part	104412012
mounting adapter 6201 RAL 7015	optional	104575292