


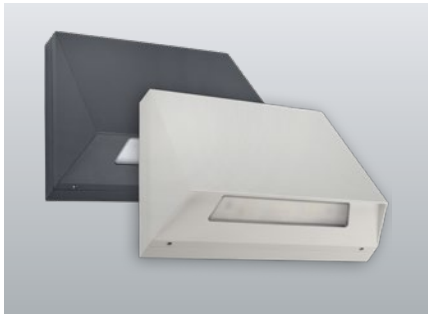


Luminaire with targeted light output. Robust trapezoidal luminaire housing for wall mounting made of powder-coated die-cast aluminium. High protection rating for outdoor installation. And optional cable entry at the side.

Technical data

Material:	die-cast aluminum powder-coated	Apparent power:	11,5 VA
Illuminant:	replaceable 18 x 0,3W LED-module	Effective power:	9,8 W
Luminous flux:	687 lm	Inrush current:	8 A / 50 µs
Nominal voltage AC:	230V ±10% 50/60 Hz	Protection class:	I
Nominal voltage DC:	176 - 264 V	Input terminals:	2.5mm² feed through wiring
Nominal current AC:	50 mA	Temperature ta:	-15...+40 °C
Nominal current DC:	39 mA	Impact resistance:	IK09

Technical data (General lighting)

Luminous flux:	687 lm
-----------------------	--------



Wall mounting: Minimum illumination 1.0lx

	1.0m	2.0m	3.0m
Bollard console (0.8m)	2.6	6.1	4.3
1.0	2.9	6.9	2.8
1.5	3.6	8.7	3.7
2.0	4.2	10.0	4.3
2.5	4.6	11.2	4.8
3.0	5.0	12.2	5.2
3.5	5.3	13.0	5.6
4.0	5.6	13.8	5.8
4.5	5.8	14.5	6.1
5.0	6.0	15.1	6.3
5.5	6.1	15.6	6.4
6.0	6.2	16.0	6.5


Articles

SN 6201 -06 LED J/SV						
Colors	DB 703	HWF 7015	RAL 7015	RAL 9016	HWF 9016	HWF (special)
Art. no.	104359569	104359771	104359367	104359266	104359670	104359872

wall mounting


Light colour: 3000 K

Protection category:
IP65




mounting adapter 6201 RAL 7015

Art. no. 104575292




Anchor plate bollard console6201

Art. no. 104892665


Pollerkonsole 6201 RAL 7015

Art. no. 104927728



Name	Accessories	Art. no.
Anchor plate bollard console6201	optional	104892665
J-ET 7 SV - max. 12V DC650mA const	spare part	101420772
LM 176x20 18/3K KB150 LED Modul	spare part	104412113
Pollerkonsole 6201 RAL 7015	optional	104927728
mounting adapter 6201 RAL 7015	optional	104575292