


LED safety light for installation in metal handrails, e.g. made of stainless steel or aluminium with a round cross-section of 38-52mm and a tube wall thickness of  $\geq 1.5\text{mm}$ . Nickel-plated brass housing with high degree of protection IP66. Simple mounting in an M18x1 threaded hole. Luminaires for connection to external INOTEC LED drivers (230V or 24V).

**Electrical specifications can be found in the operating instructions.**

**Technical data**

<b>Illuminant:</b>	max. 2W LED-module
<b>Luminous flux:</b>	85 lm
<b>Nominal voltage DC:</b>	24 V $\pm 25\%$



<b>Protection class:</b>	III
<b>Input terminals:</b>	2.5mm <sup>2</sup> feed through wiring
<b>Temperature ta:</b>	-15...+40 °C



**Articles**


<b>SN 6400-11 SLB LED 24V</b>	
Colors	-
Art. no.	101279518
Light colour: 3000 K Protection category: IP66	

<b>SN 6400-11 SLB LED 24V</b>	
Colors	-
Art. no.	101279619
Light colour: 4000 K Protection category: IP66	

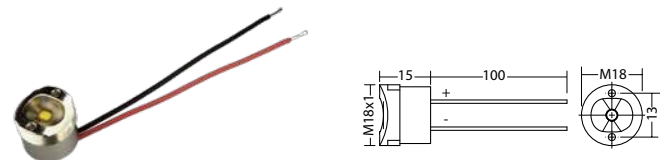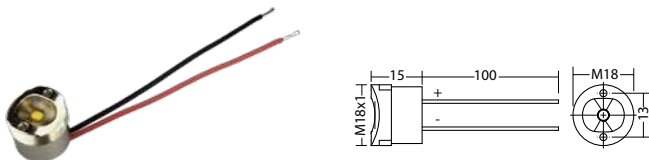

<b>L - Jet 3 / S - max. 24V DC, 320mA const</b>	Art. no. 101422287
required	

<b>Installation box LED-driver IP66</b>	Art. no. 101428755
optional	



Name	Accessories	Art. no.
	optional	30100
	optional	204004
Installation box LED-driver IP66	optional	101428755