


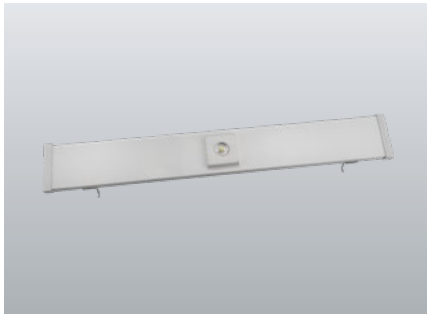


LED safety luminaire with optimised light distribution for the illumination of escape routes. Geräteträger VL2TM 13-pol. für RIDI LINIA EVO-Tragschiene. Einfaches Einclippen mit Hilfe der werkzeuglos zu betätigenden Rastverschlüsse zur elektrischen Kontaktierung inkl. Stromkreisauswahl und mechanischen Befestigung.

Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 1 x 1,8W LED-module	Effective power:	2,7 W
Luminous flux:	139 lm	Protection class:	III
Nominal voltage DC:	24 V $\pm$ 25 %	Input terminals:	2.5mm ² feed through wiring
Nominal current DC:	110 mA	Temperature ta:	-15...+40 °C



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

	2.5	6.2	16.4	5.2	1.8
3.0	4.8	17.1	5.3	1.8	
3.5	4.4	16.5	5.3	1.6	
4.0	3.4	14.2	5.2	1.3	
4.5	2.7	13.5	4.9	0.8	

Articles

SN 8300 -03 ALB LED 24V	
Colors	RAL 9016
Art. no.	104875588

for installation in RIDI LINIA Light colour: 4000 K Protection category: IP20

Name	Accessories	Art. no.
ILD 24/4-CC-320-C	spare part	101425321

