


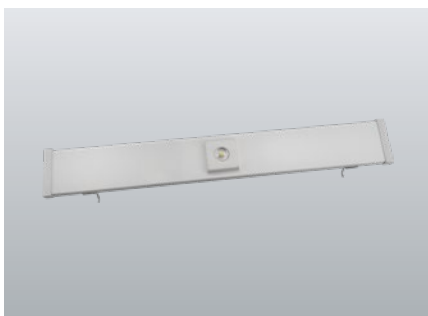


LED safety luminaire with optimised light distribution for the illumination of escape routes mit großen Lichtpunkthöhen. Geräteträger VL2TM 13-pol. für RIDI LINIA EVO-Tragschiene. Einfaches Einclippen mit Hilfe der werkzeuglos zu betätigenden Rastverschlüsse zur elektrischen Kontaktierung inkl. Stromkreiswahl und mechanischen Befestigung.

Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 1 x 3,5W LED-module	Effective power:	4,6 W
Luminous flux:	531 lm	Protection class:	III
Nominal voltage DC:	24 V $\pm$ 25 %	Input terminals:	2.5mm ² feed through wiring
Nominal current DC:	190 mA	Temperature ta:	-15...+40 °C



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

Beam diameter (mm)	Beam angle (°)	Beam diameter (mm)	Beam angle (°)	Beam diameter (mm)	Beam angle (°)
13.0	0.0	8.6	27.6	8.4	
14.0	0.0	8.7	27.8	7.9	
15.0	2.7	9.0	27.6	7.2	
16.0	0.0	9.1	26.9	6.1	

Articles

SN 8300 -12 AHB LED 24V		Name	Accessories	Art. no.
Colors	RAL 9016	ILD 24/4-CC-320-C	spare part	101425321
Art. no.	104875487			

for installation in RIDI LINIA Light colour: 4000 K Protection category: IP20
EVO VL2TM...-13 trunking rail

