


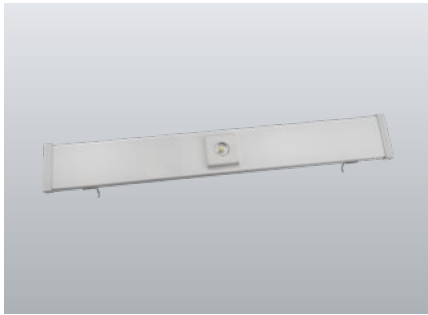


LED safety luminaire with optimised light distribution for the illumination of areas. Geräteträger VL2TM 13-pol. für RIDI LINIA EVO-Tragschiene. Einfaches Einclippen mit Hilfe der werkzeuglos zu betätigenden Rastverschlüsse zur elektrischen Kontaktierung inkl. Stromkreisauswahl und mechanischen Befestigung.

Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 1 x 3,5W LED-module
Luminous flux:	513 lm
Nominal voltage AC:	230V $\pm 10\%$ 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	33 mA
Nominal current DC:	25 mA

Apparent power:	7,6 VA
Effective power:	5,7 W
Inrush current:	8 A / 50 μ s
Protection class:	I
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+40 °C



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

2.5	5.8	15.1
3.0	5.9	16.1
3.5	5.8	16.5
4.0	5.7	16.7
4.5	5.4	16.6
5.0	4.9	16.5
5.5	3.7	16.3
6.0	1.4	15.9

Minimum illumination 1.0lx (area illumination), Maintenance factor 0.8


2.5	4.5	12.6
3.0	4.9	14.0
3.5	5.0	14.9
4.0	4.6	15.5
4.5	4.1	15.1
5.0	3.9	14.5
5.5	3.7	14.3
6.0	3.5	14.1

Articles

SN 8300 -12 SLB LED J/SV

Colors	-	RAL 9016
Art. no.	104934192	104874780


for installation in RIDI LINIA Light colour: 4000 K Protection category: IP20
EVO VL2TM...-13 trunking rail

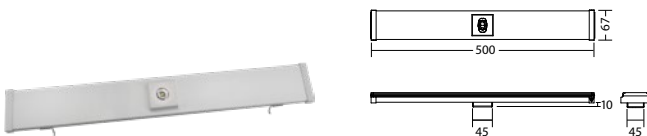

SN 8300 -12 SLB LED J/SV

Colors	-	RAL 9016
Art. no.	104934192	104874780

for installation in RIDI LINIA Light colour: 4000 K Protection category: IP20
EVO VL2TM...-13 trunking rail

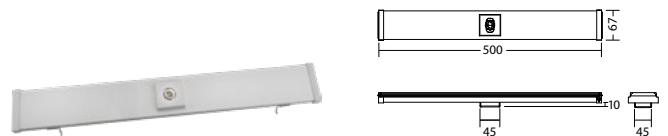

Name	Accessories	Art. no.
J-ET 5.1 SV-max. 24V DC320mA const.	spare part	101422893