


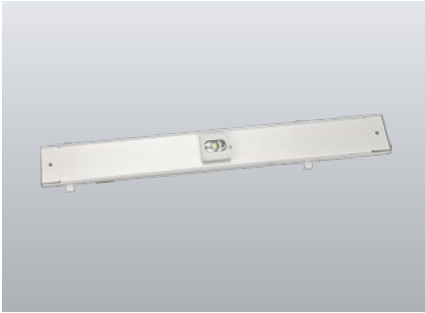


LED safety luminaire with optimised light distribution for the illumination of escape routes. Geräteträger für Maxos fusion und Maxos unify (LL5..T 4x2.5+8x1.5 Gen2 ..) Tragschiene. Einfaches Einclippen mit Hilfe der werkzeuglos zu betätigenden Rastverschlüsse zur elektrischen Kontaktierung inkl. Stromkreisauswahl und mechanischen Befestigung.

Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 1 x 0,9W LED-module	Apparent power:	3,5 VA
Luminous flux:	139 lm	Effective power:	2,6 W
Nominal voltage AC:	230V ±10% 50/60 Hz	Inrush current:	8 A / 50 µs
Nominal voltage DC:	176 - 264 V	Input terminals:	2.5mm ² feed through wiring
Nominal current AC:	15 mA	Temperature ta:	-15...+40 °C
Nominal current DC:	12 mA		



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8


2.5	6.2	16.4	5.2	1.8
3.0	4.8	17.1	5.3	1.8
3.5	4.4	16.5	5.3	1.6
4.0	3.4	14.2	5.2	1.3
4.5	2.7	13.5	4.9	0.8


Articles

SN 8300 -03 ALB LED J/SV		Name	Accessories	Art. no.
Colors	RAL 9003	J-ET 5.1 SV-max. 24V DC320mA const.	spare part	101422893
Art. no.	104314911			

for installation in Signify
Maxos fusion & Maxos unify
trunking rail 13 -cores

Light colour: 4000 K



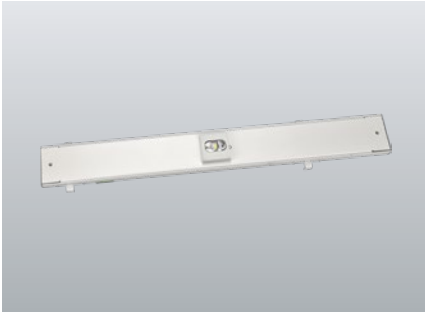


LED safety luminaire with optimised light distribution for the illumination of escape routes. Geräteträger für Maxos fusion und Maxos unify (LL5..T 4x2.5+8x1.5 Gen2 ..) Tragschiene. Einfaches Einclippen mit Hilfe der werkzeuglos zu betätigenden Rastverschlüsse zur elektrischen Kontaktierung inkl. Stromkreisauswahl und mechanischen Befestigung.

Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 1 x 0,9W LED-module	Apparent power:	3,5 VA
Luminous flux:	139 lm	Effective power:	2,6 W
Nominal voltage AC:	230V ±10% 50/60 Hz	Inrush current:	8 A / 50 µs
Nominal voltage DC:	176 - 264 V	Input terminals:	2.5mm ² feed through wiring
Nominal current AC:	15 mA	Temperature ta:	-15...+40 °C
Nominal current DC:	12 mA		



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

Beam diameter (m)	Beam area (m²)	Beam diameter (m)	Beam area (m²)	Beam diameter (m)	Beam area (m²)
2.5	6.2	3.0	4.8	3.5	4.4
3.0	4.8	4.0	3.4	4.5	2.7
3.5	4.4				
4.0	3.4				
4.5	2.7				

Articles

SN 8300 -03 ALB LED J/SV		Name	Accessories	Art. no.
Colors	RAL 9003	J-ET 5.1 SV-max. 24V DC320mA const.	spare part	101422893
Art. no.	104314911			

for installation in Signify
Maxos fusion & Maxos unify
trunking rail 13 -cores
Light colour: 4000 K

