


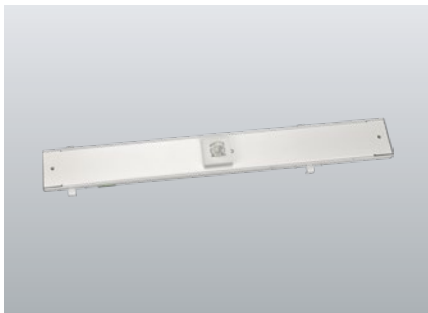


LED safety luminaire with optimised light distribution for the illumination of escape routes mit großen Lichtpunkthöhen. Geräteträger für Maxos fusion und Maxos unify (LL5..T 4x2.5+8x1.5 Gen2 ..) Tragschiene. Einfaches Einclippen mit Hilfe der werkzeuglos zu betätigenden Rastverschlüsse zur elektrischen Kontaktierung inkl. Stromkreisauswahl und mechanischen Befestigung.

Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 1 x 3,5W LED-module
Luminous flux:	531 lm
Nominal voltage AC:	230V ±10% 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	33 mA
Nominal current DC:	25 mA

Apparent power:	7,6 VA
Effective power:	5,7 W
Inrush current:	8 A / 50 µs
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+40 °C



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8


	13.0	14.0	15.0	16.0
0.0	0.0	0.0	2.7	0.0
8.6	8.7	9.0	9.1	
27.6	27.8	27.6	26.9	
8.4	7.9	7.2	6.1	


Articles

SN 8300 -12 AHB LED J/SV

Colors	RAL 9003
Art. no.	104315113
for installation in Signify Maxos fusion & Maxos unify trunking rail 13 -cores	Light colour: 4000 K

Name	Accessories	Art. no.
J-ET 5.1 SV-max. 24V DC320mA const.	spare part	101422893



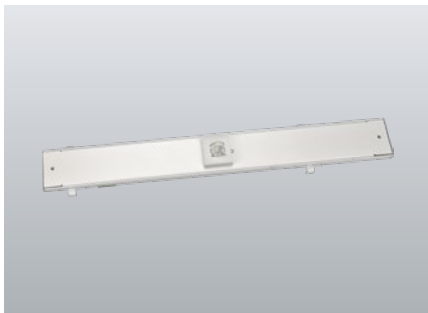


LED safety luminaire with optimised light distribution for the illumination of escape routes mit großen Lichtpunkthöhen. Geräteträger für Maxos fusion und Maxos unify (LL5..T 4x2.5+8x1.5 Gen2 ..) Tragschiene. Einfaches Einclippen mit Hilfe der werkzeuglos zu betätigenden Rastverschlüsse zur elektrischen Kontaktierung inkl. Stromkreiswahl und mechanischen Befestigung.

Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 1 x 3,5W LED-module	Apparent power:	7,6 VA
Luminous flux:	531 lm	Effective power:	5,7 W
Nominal voltage AC:	230V ±10% 50/60 Hz	Inrush current:	8 A / 50 µs
Nominal voltage DC:	176 - 264 V	Input terminals:	2.5mm ² feed through wiring
Nominal current AC:	33 mA	Temperature ta:	-15...+40 °C
Nominal current DC:	25 mA		



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

	13.0	14.0	15.0	16.0
0.0	0.0	0.0	2.7	0.0
8.6	8.7	9.0	9.1	
27.6	27.8	27.6	26.9	
8.4	7.9	7.2	6.1	

Articles

SN 8300 -12 AHB LED J/SV

Colors	RAL 9003
Art. no.	104315113
for installation in Signify Maxos fusion & Maxos unify trunking rail 13 -cores	Light colour: 4000 K

Name	Accessories	Art. no.
J-ET 5.1 SV-max. 24V DC320mA const.	spare part	101422893

