


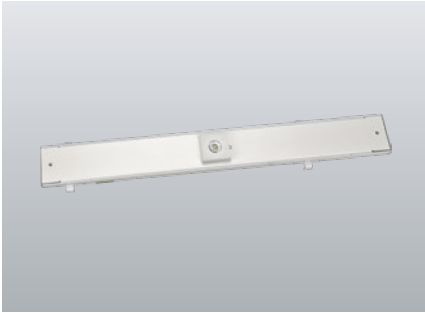


LED safety luminaire with optimised light distribution for the illumination of areas. Geräteträger für Maxos fusion und Maxos unify (LL5..T 4x2.5+8x1.5 Gen2 ..) Tragschiene. Einfaches Einclippen mit Hilfe der werkzeuglos zu betätigenden Rastverschlüsse zur elektrischen Kontaktierung inkl. Stromkreiswahl und mechanischen Befestigung.

Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 4 x 1W LED-module	Apparent power:	8,3 VA
Luminous flux:	517 lm	Effective power:	7,4 W
Nominal voltage AC:	230V ±10% 50/60 Hz	Inrush current:	8 A / 50 µs
Nominal voltage DC:	176 - 264 V	Input terminals:	2.5mm ² feed through wiring
Nominal current AC:	36 mA	Temperature ta:	-15...+40 °C
Nominal current DC:	32 mA		



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

2.5	5.8	15.1
3.0	5.9	16.1
3.5	5.8	16.5
4.0	5.7	16.7
4.5	5.4	16.6
5.0	4.9	16.5
5.5	3.7	16.3
6.0	1.4	15.9


Minimum illumination 1.0lx (area illumination), Maintenance factor 0.8


2.5	4.5	12.6
3.0	4.9	14.0
3.5	5.0	14.9
4.0	4.6	15.5
4.5	4.1	15.1
5.0	3.9	14.5
5.5	3.7	14.3
6.0	3.5	14.1

Articles

SN 8300 -12 SLB LED J/SV		Name	Accessories	Art. no.
Colors	RAL 9003	J-ET 5.1 SV-max. 24V DC320mA const.	spare part	101422893
Art. no.	104306726			

for installation in Signify
Maxos fusion & Maxos unify
trunking rail 13 -cores
Light colour: 4000 K



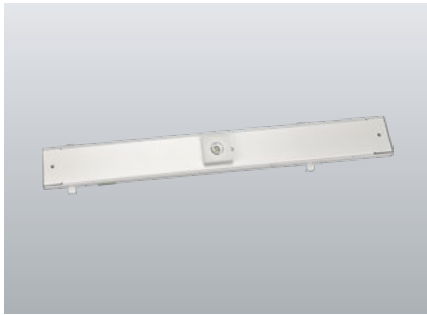


LED safety luminaire with optimised light distribution for the illumination of areas. Geräteträger für Maxos fusion und Maxos unify (LL5..T 4x2.5+8x1.5 Gen2 ..) Tragschiene. Einfaches Einclippen mit Hilfe der werkzeuglos zu betätigenden Rastverschlüsse zur elektrischen Kontaktierung inkl. Stromkreiswahl und mechanischen Befestigung.

Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 4 x 1W LED-module	Apparent power:	8,3 VA
Luminous flux:	517 lm	Effective power:	7,4 W
Nominal voltage AC:	230V ±10% 50/60 Hz	Inrush current:	8 A / 50 µs
Nominal voltage DC:	176 - 264 V	Input terminals:	2.5mm ² feed through wiring
Nominal current AC:	36 mA	Temperature ta:	-15...+40 °C
Nominal current DC:	32 mA		



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

2.5	5.8	15.1
3.0	5.9	16.1
3.5	5.8	16.5
4.0	5.7	16.7
4.5	5.4	16.6
5.0	4.9	16.5
5.5	3.7	16.3
6.0	1.4	15.9

Minimum illumination 1.0lx (area illumination), Maintenance factor 0.8


2.5	4.5	12.6
3.0	4.9	14.0
3.5	5.0	14.9
4.0	4.6	15.5
4.5	4.1	15.1
5.0	3.9	14.5
5.5	3.7	14.3
6.0	3.5	14.1

Articles

SN 8300 -12 SLB LED J/SV

Colors	RAL 9003
Art. no.	104306726

for installation in Signify Maxos fusion & Maxos unify trunking rail 13 -cores
Light colour: 4000 K



Name	Accessories	Art. no.
J-ET 5.1 SV-max. 24V DC320mA const.	spare part	101422893