



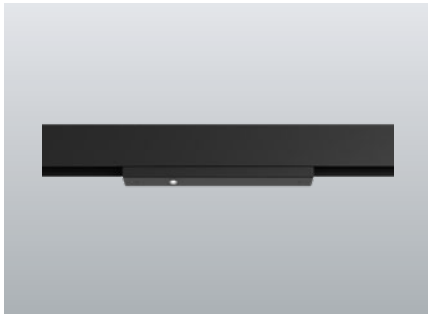

LED emergency luminaire with optimized light distribution for illuminating escape routes. LED device carrier for XAL MOVE IT PRO with locking function of the circuit selector switch.

Technical data

Illuminant:	1 x 3,5W LED-module	Effective power:	5,1 W
Luminous flux:	478 lm	Protection class:	III
Nominal voltage DC:	24 V $\pm$ 25 %	Input terminals:	2.5mm ² feed through wiring
Nominal current DC:	210 mA	Temperature ta:	-15...+40 °C



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

Mounting height (m)	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
2.5	8.7	21.1	8.5	3.5				
3.0	9.3	23.0	9.3	3.8				
3.5	9.6	24.6	10.1	4.0				
4.0	9.4	25.9	10.7	4.1				
4.5	8.9	26.7	11.1	4.0				
5.0	8.6	27.2	11.4	4.0				
5.5	8.5	27.0	11.5	3.9				
6.0	8.3	26.2	11.3	3.7				

Articles

SN 9024.1 MOVE IT PRO -12 ALB LED 24V			Name	Accessories	Art. no.
Colors	RAL 9005	RAL 9016	ILD 24/4-CC-320-L Mini	spare part	104757370
Art. no.	104906308	104980874	LM 24x21 1(12V)/4K KB300 LED Modul	spare part	104828506

zum Einbau in XAL Lichtband-Light colour: 4000 K Protection category: IP20

