



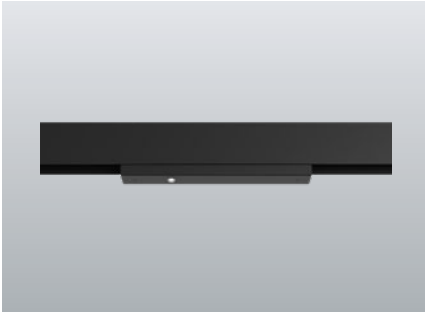

LED emergency luminaire with optimized light distribution for illuminating escape routes. LED device carrier for XAL MOVE IT PRO with locking function of the circuit selector switch.

Technical data

Illuminant:	1 x 3,5W LED-module	Apparent power:	7,2 VA
Luminous flux:	478 lm	Effective power:	6,0 W
Nominal voltage AC:	230V ±10% 50/60 Hz	Inrush current:	6 A / 98 µs
Nominal voltage DC:	176 - 264 V	Protection class:	I
Nominal current AC:	31 mA	Input terminals:	2.5mm ² feed through wiring
Nominal current DC:	26 mA	Temperature ta:	-15...+40 °C



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0
8.7	9.3	9.6	9.4	8.9	8.6	8.5	8.3
21.1	23.0	24.6	25.9	26.7	27.2	27.0	26.2
8.5	9.3	10.1	10.7	11.1	11.4	11.5	11.3
3.5	3.8	4.0	4.1	4.0	4.0	3.9	3.7

Articles

SN 9024.1 MOVE IT PRO -12 ALB LED J/SV			Name	Accessories	Art. no.
Colors	RAL 9005	RAL 9016	J-ET 5.1 SV-max. 24V DC320mA const.	spare part	101422893
Art. no.	104906207	104980672	LM 24x21 1(12V)/4K KB300 LED Modul	spare part	104828506

zum Einbau in XAL Lichtband- Light colour: 4000 K Protection category:
system MOVE IT PRO IP20

