

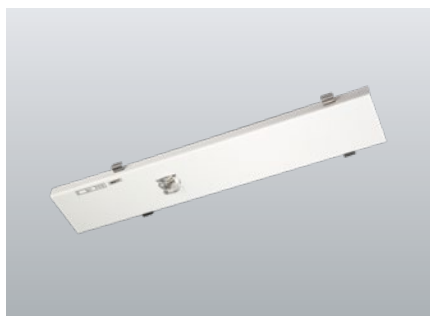




LED safety luminaire with optimised light distribution for the illumination of escape routes with high mounting heights. LED carrier for Trilux E-Line trunking system 7650...7LV + 5LV with stainless steel snap locks that can be applied tool-free. Automatic electrical connection by a plug-in contact with circuit selection. Incl. 4-chip LED illuminant for maximum safety.

**Technical data**

Illuminant:	replaceable 1 x 3,5W LED-module	Effective power:	4,5 W
Luminous flux:	531 lm	Input terminals:	2.5mm ² feed through wiring
Nominal voltage DC:	24 V ±20 %	Temperature ta:	-15...+40 °C
Nominal current DC:	185 mA		



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

Beam diameter (m)	Beam diameter (m)	Beam diameter (m)	Beam diameter (m)	Beam diameter (m)
13.0	0.0	8.6	27.6	8.4
14.0	0.0	8.7	27.8	7.9
15.0	2.7	9.0	27.6	7.2
16.0	0.0	9.1	26.9	6.1

Articles

SN LINE E -12 AHB LED 24V		Name	Accessories	Art. no.
Colors	RAL 9016	L-JET 3 - max. 24V DC, 320mAconst	spare part	101421176
Art. no.	101352872			

07650...7LV+5LV Trilux E-Line Light colour: 4000 K Protection category: IP20

