





LED safety luminaire with optimised light distribution for the illumination of escape routes. LED carrier for Trilux E-Line NEXT FIX trunking system 07650Fi L... 7+7LV... or 07650Fi... 7LV+5LV... with snap locks that can be applied tool-free. Incl. 4-chip LED illuminant for maximum safety.

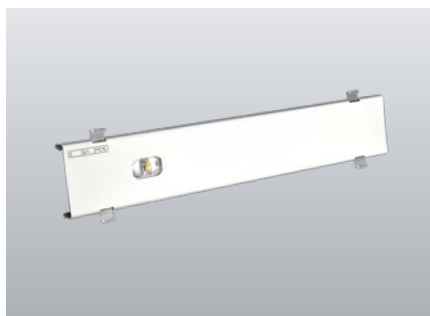

Technical data

Illuminant:	replaceable 1 x 0,9W LED-module
Luminous flux:	139 lm
Nominal voltage AC:	230V ±10% 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	15 mA
Nominal current DC:	12 mA

Apparent power:	3,5 VA
Effective power:	2,6 W
Inrush current:	6 A / 98 µs
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+40 °C



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

	2.5	6.2	16.4	5.2	1.8
2.5	3.0	4.8	17.1	5.3	1.8
3.5	4.4	16.5	5.3	1.6	
4.0	3.4	14.2	5.2	1.3	
4.5	2.7	13.5	4.9	0.8	

Articles

SN LINE FIX E-03 ALB LED J/SV			
Colors	RAL 9005	RAL 9006	RAL 9016
Art. no.	101319833	101319732	101319631

07650Fi L... 7+7LV... or Light colour: 4000 K Protection category:
07650Fi... 7LV+5LV... Trilux E-LI- IP20
NE NEXT FIX

Name	Accessories	Art. no.
J-ET 5.1 SV-max. 24V DC320mA const.	spare part	101422893

