



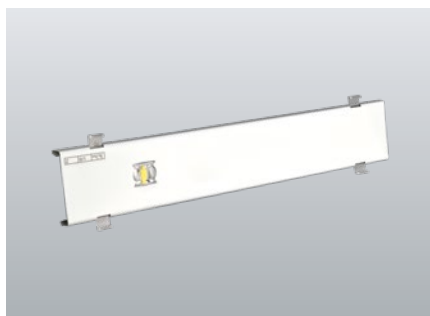


LED safety luminaire with optimised light distribution for the illumination of escape routes with high mounting heights. LED carrier for Trilux E-Line NEXT FIX trunking system 07650Fi L... 7+7LV... or 07650Fi... 7LV+5LV... with snap locks that can be applied tool-free. Incl. 4-chip LED illuminant for maximum safety.



Technical data

Illuminant:	replaceable 1 x 1,8W LED-module	Effective power:	2,7 W
Luminous flux:	287 lm	Input terminals:	2.5mm ² feed through wiring
Nominal voltage DC:	24 V ±20 %	Temperature ta:	-15...+40 °C
Nominal current DC:	110 mA		



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

Beam diameter (m)	5.0	6.3	15.6	5.7	1.9
Illuminance (lx)	287	169	18.1	5.1	2.1
Beam diameter (m)	7.0	7.0	18.1	5.4	2.2
Illuminance (lx)	203	169	18.1	5.4	2.2
Beam diameter (m)	8.0	7.1	19.1	5.7	2.3
Illuminance (lx)	169	169	18.1	5.7	2.3
Beam diameter (m)	9.0	6.5	19.9	6.1	2.3
Illuminance (lx)	147	169	18.1	6.1	2.3
Beam diameter (m)	10.0	6.0	20.3	6.4	2.1
Illuminance (lx)	126	169	18.1	6.4	2.1
Beam diameter (m)	11.0	5.3	20.3	6.6	2.0
Illuminance (lx)	109	169	18.1	6.6	2.0

Articles

SN LINE FIX E-06 AHB LED 24V				Name	Accessories	Art. no.
Colors	RAL 9005	RAL 9006	RAL 9016	L-JET 3 - max. 24V DC, 320mAconst	spare part	101421176
Art. no.	101351559	101351458	101351357			

07650Fi L... 7+7LV... or Light colour: 4000 K Protection category: IP20
07650Fi... 7LV+5LV... Trilux E-LI-
NE NEXT FIX

