



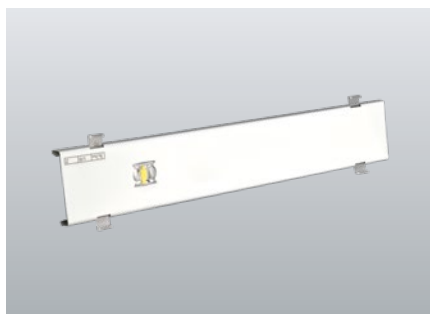


LED safety luminaire with optimised light distribution for the illumination of escape routes with high mounting heights. LED carrier for Trilux E-Line NEXT FIX trunking system 07650Fi L... 7+7LV... or 07650Fi... 7LV+5LV... with snap locks that can be applied tool-free. Incl. 4-chip LED illuminant for maximum safety.



Technical data

Illuminant:	replaceable 1 x 3,5W LED-module
Luminous flux:	531 lm
Nominal voltage AC:	230V ±10% 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	25 mA
Nominal current DC:	25 mA

Apparent power:	5,8 VA
Effective power:	5,5 W
Inrush current:	6 A / 34 µs
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+40 °C



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

	13.0	14.0	15.0	16.0
0.0	0.0	0.0	2.7	0.0
8.6	8.7	9.0	9.1	
27.6	27.8	27.6	26.9	
8.4	7.9	7.2	6.1	

Articles

SN LINE FIX E -12 AHB FLD 230V		
Colors	RAL 9006	RAL 9016
Art. no.	102308930	102460591

07650Fi L... 7+7LV... or Light colour: 4000 K Protection category:
07650Fi... 7LV+5LV... Trilux E-LI- IP20
NE NEXT FIX

Name	Accessories	Art. no.
FLD 230/4 - CC - 320 - L	spare part	101965083

