





LED safety luminaire with optimised light distribution for the illumination of areas. LED carrier for Trilux E-Line NEXT FIX trunking system 07650Fi L... 7+7LV... or 07650Fi... 7LV+5LV... with snap locks that can be applied tool-free. Incl. 4-chip LED illuminant for maximum safety.

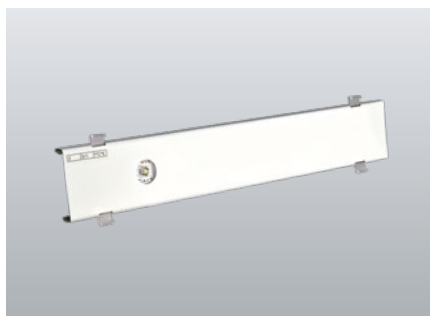

Technical data

Illuminant:	replaceable 1 x 3,5W LED-module
Luminous flux:	517 lm
Nominal voltage DC:	24 V $\pm$ 20 %
Nominal current DC:	185 mA

Effective power:	4,5 W
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+40 °C



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

2.5	4.6	12.8
3.0	4.6	13.1
3.5	4.3	13.2
4.0	3.7	13.1
4.5	2.2	12.7

Minimum illumination 1.0lx (area illumination), Maintenance factor 0.8

2.5	3.7	11.7
3.0	3.7	12.3
3.5	3.2	12.8
4.0	2.9	12.3
4.5	2.6	12.3
5.0	2.4	12.3
5.5	2.2	10.8
6.0	2.0	9.9

Articles

SN LINE FIX E-12 SLB LED 24V			
Colors	RAL 9005	RAL 9006	RAL 9016
Art. no.	101350650	101350549	101350448

07650Fi L... 7+7LV... or Light colour: 4000 K Protection category: IP20
07650Fi... 7LV+5LV... Trilux E-LI-NE NEXT FIX

Name	Accessories	Art. no.
L-JET 3 - max. 24V DC, 320mAconst	spare part	101421176

