





LED safety luminaire with optimised light distribution for the illumination of areas. LED carrier for Trilux E-Line NEXT FIX trunking system 07650Fi L... 7+7LV... or 07650Fi... 7LV+5LV... with snap locks that can be applied tool-free. Incl. 4-chip LED illuminant for maximum safety.

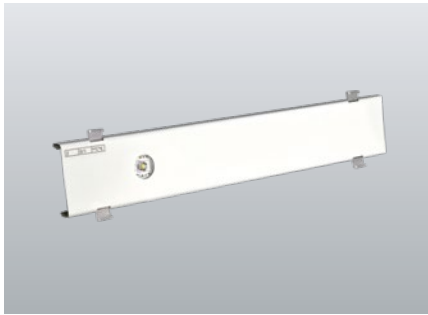

Technical data

Illuminant:	replaceable 1 x 3,5W LED-module	Apparent power:	7,6 VA
Luminous flux:	517 lm	Effective power:	5,7 W
Nominal voltage AC:	230V ±10% 50/60 Hz	Inrush current:	6 A / 98 µs
Nominal voltage DC:	176 - 264 V	Input terminals:	2.5mm ² feed through wiring
Nominal current AC:	33 mA	Temperature ta:	-15...+40 °C
Nominal current DC:	25 mA		



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

	2.5	5.8	15.1
2.5	3.0	5.9	16.1
3.0	3.5	5.8	16.5
4.0	4.0	5.7	16.7
4.5	4.5	5.4	16.6
5.0	5.0	4.9	16.5
5.5	5.5	3.7	16.3
6.0	6.0	1.4	15.9

Minimum illumination 1.0lx (area illumination), Maintenance factor 0.8

	2.5	4.5	12.6
2.5	3.0	4.9	14.0
3.0	3.5	5.0	14.9
4.0	4.0	4.6	15.5
4.5	4.5	4.1	15.1
5.0	5.0	3.9	14.5
5.5	5.5	3.7	14.3
6.0	6.0	3.5	14.1

Articles

SN LINE FIX E-12 SLB LED J/SV			
Colors	RAL 9005	RAL 9006	RAL 9016
Art. no.	101319227	101319126	101319025

07650Fi L... 7+7LV... or Light colour: 4000 K Protection category: IP20
 07650Fi... 7LV+5LV... Trilux E-LI-NE NEXT FIX

Name	Accessories	Art. no.
J-ET 5.1 SV-max. 24V DC320mA const.	spare part	101422893

