


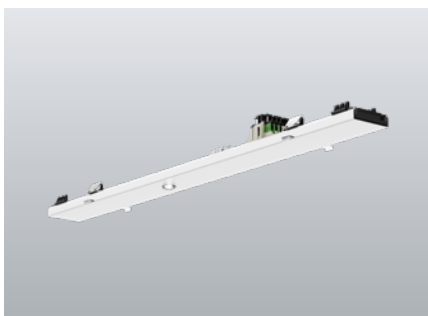


LED safety luminaire with optimised light distribution for the illumination of escape routes. LED carrier for Trilux trunking system E-Line PRO 078...13 LV with snap locks that can be applied tool-free. Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 1 x 0,9W LED-module
Luminous flux:	139 lm
Nominal voltage AC:	230V ±10% 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	13 mA
Nominal current DC:	12 mA

Apparent power:	3,0 VA
Effective power:	2,6 W
Inrush current:	6 A / 34 µs
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+40 °C



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

2.5	6.2	16.4	5.2	1.8
3.0	4.8	17.1	5.3	1.8
3.5	4.4	16.5	5.3	1.6
4.0	3.4	14.2	5.2	1.3
4.5	2.7	13.5	4.9	0.8

Articles

SN LINE PRO -03 ALB FLD 230V

Colors	RAL 9005	RAL 9006	RAL 9016
Art. no.	104722210	104721095	104719883

Trilux E-Line PRO 078...13 LV Light colour: 4000 K Protection category: IP50

