



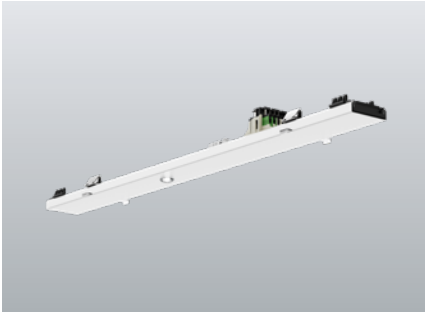

LED safety luminaire with optimised light distribution for the illumination of escape routes. LED carrier for Trilux trunking system E-Line PRO 078...13 LV with snap locks that can be applied tool-free. Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 1 x 0,9W LED-module	Apparent power:	3,5 VA
Luminous flux:	139 lm	Effective power:	2,6 W
Nominal voltage AC:	230V $\pm$ 10% 50/60 Hz	Inrush current:	6 A / 98 μ s
Nominal voltage DC:	176 - 264 V	Input terminals:	2.5mm ² feed through wiring
Nominal current AC:	15 mA	Temperature ta:	-15...+40 °C
Nominal current DC:	12 mA		



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

Beam diameter (m)	Beam area (m²)	Beam diameter (m)	Beam area (m²)	Beam diameter (m)	Beam area (m²)
2.5	6.2	3.0	4.8	3.5	4.4
3.0	4.8	4.0	3.4	4.5	2.7
3.5	4.4				
4.0	3.4				
4.5	2.7				

Articles

SN LINE PRO -03 ALB LED J/SV			
Colors	RAL 9005	RAL 9006	RAL 9016
Art. no.	104721402	104720287	104719075
Trilux E-Line PRO 078...13 LV Light colour: 4000 K Protection category: IP50			

