



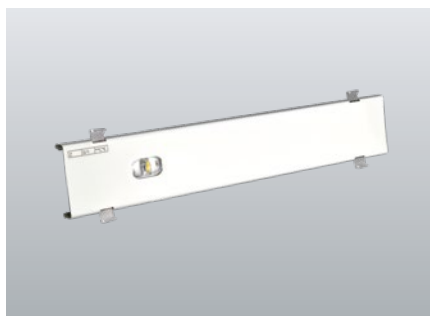

LED safety luminaire with optimised light distribution for the illumination of escape routes. LED carrier for Trilux trunking system E-Line PRO 078...13 LV with snap locks that can be applied tool-free. Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 1 x 0,9W LED-module	Effective power:	1,7 W
Luminous flux:	139 lm	Input terminals:	2.5mm ² feed through wiring
Nominal voltage DC:	24 V ±25 %	Temperature ta:	-15...+40 °C
Nominal current DC:	70 mA		



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

Beam diameter (m)	Beam area (m²)	Beam diameter (m)	Beam area (m²)	Beam diameter (m)	Beam area (m²)
2.5	6.2	3.0	4.8	3.5	4.4
3.0	4.8	3.5	4.4	4.0	3.4
3.5	4.4	4.0	3.4	4.5	2.7
4.0	3.4	4.5	2.7		
4.5	2.7				

Articles

SN LINE PRO -03 ALB LED 24V

Colors	RAL 9005	RAL 9006	RAL 9016
Art. no.	104718267	104717055	104715843

Trilux E-Line PRO 078...13 LV Light colour: 4000 K Protection category: IP20

