



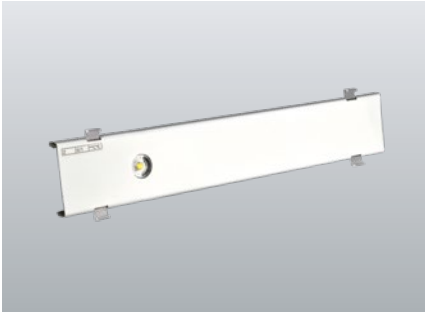

LED safety luminaire with optimised light distribution for the illumination of areas with high mounting heights. LED carrier for Trilux trunking system E-Line PRO 078...13 LV with snap locks that can be applied tool-free. Incl. 4-chip LED illuminant for maximum safety.

Technical data

Illuminant:	replaceable 1 x 3,5W LED-module	Apparent power:	7,6 VA
Luminous flux:	545 lm	Effective power:	5,7 W
Nominal voltage AC:	230V ±10% 50/60 Hz	Inrush current:	6 A / 98 µs
Nominal voltage DC:	176 - 264 V	Input terminals:	2.5mm ² feed through wiring
Nominal current AC:	33 mA	Temperature ta:	-15...+40 °C
Nominal current DC:	25 mA		



Ceiling mounting: Minimum illumination 1.0lx (middle of escape route), Maintenance factor 0.8

6.0	6.9	17.4
6.5	7.0	17.9
7.0	7.0	18.4
7.5	7.0	18.8
8.0	6.9	19.2
8.5	6.6	19.5
9.0	6.2	19.7
9.5	5.7	19.8
10.0	5.0	19.9

Minimum illumination 1.0lx (area illumination), Maintenance factor 0.8

6.0	4.9	14.2
6.5	5.1	14.7
7.0	5.0	14.9
7.5	4.9	16.2
8.0	4.7	16.3
8.5	4.7	16.8
9.0	4.6	17.5
9.5	4.5	17.7
10.0	4.3	16.6

Articles

SN LINE PRO -12 SHB LED J/SV

Colors	RAL 9005	RAL 9006	RAL 9016
Art. no.	104717762	104716550	104715338

Trilux E-Line PRO 078...13 LV Light colour: 4000 K Protection category: IP20

