


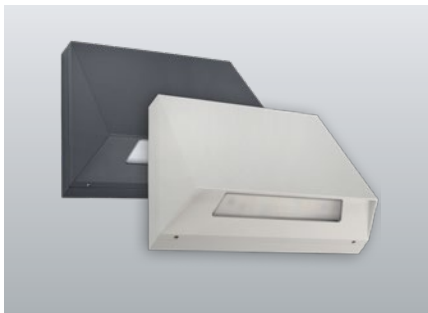

Combined luminaire for general and emergency lighting Luminaire with targeted light output. Robust trapezoidal luminaire housing for wall mounting made of powder-coated die-cast aluminium. High protection rating for outdoor installation. And optional cable entry at the side. Incl. four cable entries for through-wiring to general and emergency lighting.

Technische gegevens


Materiaal:	Gepoedercoat gegoten aluminium
Lichtbron:	24 x 0,32W + 9 x 0,32W LED module
Lumenoutput:	360 lm
Nom. spanning AC:	230V ±10% 50/60 Hz
Nom. spanning DC:	176 - 264 V
Nom. stroom AC:	36 mA
Nom. stroom DC:	24 mA

Schijnb. vermogen:	8,3 VA
Opgen. vermogen:	5,7 W
Inschakelstroom:	6 A / 34 µs
Beschermingsklasse:	I
Rijgklem:	max. 2,5 mm ² aderdikte
Temperatuurbereik:	-15...+40 °C
Slagvastheid:	IK09

Technische gegevens (algemene verlichting)

Nom. spanning AC:	230V AC/DC ±10% 50/60 Hz
Schijnb. vermogen:	12,5 VA
Actief vermogen:	10,4 W

Lichtkleur:	3000 K
Lumenoutput:	918 lm
Inschakelstroom:	8 A / 50 µs



Wandmontage: Minimale verlichtingssterkte 1,0lx

	Distance to middle of escape route					
	1.0m		2.0m		3.0m	
1.0	2.6	6.3	2.4	6.1	1.1	4.7
1.5	3.2	7.7	3.1	7.7	2.5	7.0
2.0	3.6	8.8	3.6	8.9	3.2	8.5
2.5	4.0	9.7	4.0	9.9	3.7	9.6
3.0	4.3	10.5	4.3	10.7	4.2	10.5
3.5	4.5	11.1	4.5	11.4	4.3	11.2
4.0	4.6	11.7	4.7	12.0	4.5	11.9
4.5	4.8	12.2	4.8	12.5	4.7	12.4
5.0	4.8	12.6	4.9	12.9	4.8	12.9
5.5	4.9	12.9	5.0	13.2	4.8	13.2
6.0	4.9	13.1	5.0	13.5	4.9	13.5


Artikel

SN/A 6201 FLD 230V					
Kleuren	DB 703	HWF 7015	RAL 7015	RAL 9016	HWF 9016 (speciale)
Art. Nr.	104353913	104354115	104353711	104353610	104354014 104354216


Wandmontage

Lichtkleur: 3000 K

Bescherming: IP65



mounting adapter 6201 RAL 7015 Art. Nr. 104575292



Omschrijving	Accessoires	Art. nr.
FLD 230/4 - CC - 320 - L		101965083
LM 176x20 24+9/3K KL LED Modul		104411911
mounting adapter 6201 RAL 7015	optioneel	104575292