


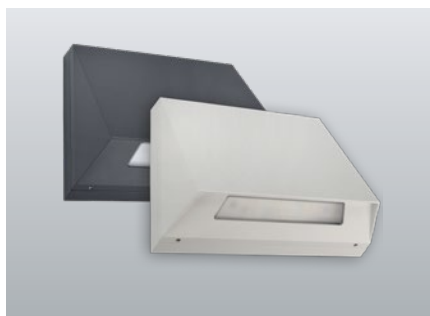


Combined luminaire for general and emergency lighting Luminaire with targeted light output. Robust trapezoidal luminaire housing for wall mounting made of powder-coated die-cast aluminium. High protection rating for outdoor installation. And optional cable entry at the side. Incl. four cable entries for through-wiring to general and emergency lighting.

Technische gegevens

Materiaal:	Gepoedercoat gegoten aluminium	Opgen. vermogen:	4,5 W
Lichtbron:	24 x 0,32W + 9 x 0,32W LED module	Beschermingsklasse:	I
Lumenoutput:	360 lm	Rijgklem:	max. 2,5 mm ² aderdikte
Nom. spanning DC:	24 V ±25 %	Temperatuurbereik:	-15...+40 °C
Nom. stroom DC:	185 mA	Slagvastheid:	IK09

Technische gegevens (algemene verlichting)

Nom. spanning AC:	230V AC/DC ±10% 50/60 Hz	Lichtkleur:	3000 K
Schijnb. vermogen:	12,5 VA	Lumenoutput:	918 lm
Actief vermogen:	10,4 W	Inschakelstroom:	8 A / 50 µs



Wandmontage: Minimale verlichtingsterkte 1,0lx

Distance to middle of escape route	Distance to middle of escape route					
	1.0m		2.0m		3.0m	
1.0	2.6	6.3	2.4	6.1	1.1	4.7
1.5	3.2	7.7	3.1	7.7	2.5	7.0
2.0	3.6	8.8	3.6	8.9	3.2	8.5
2.5	4.0	9.7	4.0	9.9	3.7	9.6
3.0	4.3	10.5	4.3	10.7	4.2	10.5
3.5	4.5	11.1	4.5	11.4	4.3	11.2
4.0	4.6	11.7	4.7	12.0	4.5	11.9
4.5	4.8	12.2	4.8	12.5	4.7	12.4
5.0	4.8	12.6	4.9	12.9	4.8	12.9
5.5	4.9	12.9	5.0	13.2	4.8	13.2
6.0	4.9	13.1	5.0	13.5	4.9	13.5


Artikel

SN/A 6201 LED 24V						
Kleuren	DB 703	HWF 7015	RAL 7015	RAL 9016	HWF 9016	HWF (speciale)
Art. Nr.	104352596	104352701	104352394	104352293	104352600	104352802
Wandmontage			Lichtkleur: 3000 K		Bescherming: IP65	

Wandmontage


Lichtkleur: 3000 K

Bescherming: IP65



mounting adapter 6201 RAL 7015

Art. Nr. 104575292



Omschrijving	Accessoires	Art. nr.
ILD 24/4-CC-320-C		101425321
LM 176x20 24+9/3K KL LED Modul		104411911
mounting adapter 6201 RAL 7015	optioneel	104575292