


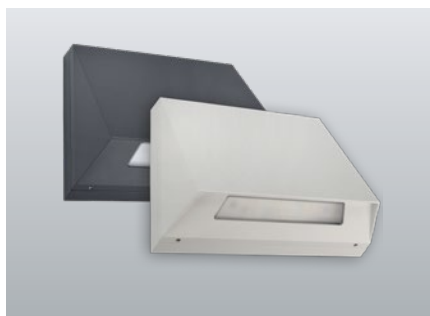


Combined luminaire for general and emergency lighting Luminaire with targeted light output. Robust trapezoidal luminaire housing for wall mounting made of powder-coated die-cast aluminium. High protection rating for outdoor installation. And optional cable entry at the side. Incl. four cable entries for through-wiring to general and emergency lighting.

Technische gegevens

Materiaal:	Gepoedercoat gegoten aluminium	Schijnb. vermogen:	7,2 VA
Lichtbron:	24 x 0,32W + 9 x 0,32W LED module	Opgen. vermogen:	5,9 W
Lumenoutput:	360 lm	Inschakelstroom:	6 A / 98 µs
Nom. spanning AC:	230V ±10% 50/60 Hz	Beschermingsklasse:	I
Nom. spanning DC:	176 - 264 V	Rijgklem:	max. 2,5 mm ² aderdikte
Nom. stroom AC:	31 mA	Temperatuurbereik:	-15...+40 °C
Nom. stroom DC:	24 mA	Slagvastheid:	IK09

Technische gegevens (algemene verlichting)

Nom. spanning AC:	230V AC/DC ±10% 50/60 Hz	Lichtkleur:	3000 K
Schijnb. vermogen:	12,5 VA	Lumenoutput:	918 lm
Actief vermogen:	10,4 W	Inschakelstroom:	8 A / 50 µs



Wandmontage: Minimale verlichtingssterkte 1,0lx

	1.0m	2.0m	3.0m
1.0	2.6	6.3	2.4
1.5	3.2	7.7	3.1
2.0	3.6	8.8	3.6
2.5	4.0	9.7	4.0
3.0	4.3	10.5	4.3
3.5	4.5	11.1	4.5
4.0	4.6	11.7	4.7
4.5	4.8	12.2	4.8
5.0	4.8	12.6	4.9
5.5	4.9	12.9	5.0
6.0	4.9	13.1	5.0

Artikel


SN/A 6201 LED J/SV

Kleuren	DB 703	HWF 7015	RAL 7015	RAL 9016	HWF 9016	HWF (speciale)
Art. Nr.	104351182	104351384	104350980	104350879	104351283	104351485

Wandmontage


Lichtkleur: 3000 K

Bescherming: IP65



mounting adapter 6201 RAL 7015

Art. Nr. 104575292



Omschrijving	Accessoires	Art. nr.
J-ET 5.1 SV-max. 24V DC320mA const.		101422893
LM 176x20 24+9/3K KL LED Modul		104411911
mounting adapter 6201 RAL 7015	optioneel	104575292