


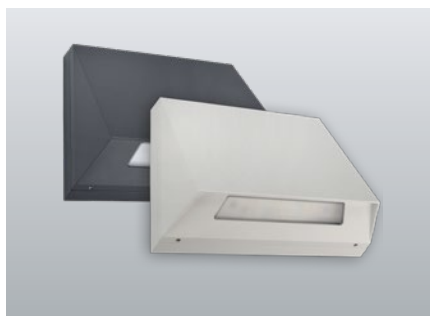


Combined luminaire for general and emergency lighting Luminaire with targeted light output. Robust trapezoidal luminaire housing for wall mounting made of powder-coated die-cast aluminium. High protection rating for outdoor installation. And optional cable entry at the side. Incl. four cable entries for through-wiring to general and emergency lighting.

Technische gegevens

Materiaal:	Gepoedercoat gegoten aluminium	Schijnb. vermogen:	7,2 VA
Lichtbron:	24 x 0,32W + 9 x 0,32W LED module	Opgen. vermogen:	5,9 W
Lumenoutput:	376 lm	Inschakelstroom:	6 A / 98 µs
Nom. spanning AC:	230V ±10% 50/60 Hz	Beschermingsklasse:	I
Nom. spanning DC:	176 - 264 V	Rijgklem:	max. 2,5 mm ² aderdikte
Nom. stroom AC:	31 mA	Temperatuurbereik:	-15...+40 °C
Nom. stroom DC:	24 mA	Slagvastheid:	IK09

Technische gegevens (algemene verlichting)

Nom. spanning AC:	230V AC/DC ±10% 50/60 Hz	Lichtkleur:	4000 K
Schijnb. vermogen:	12,5 VA	Lumenoutput:	967 lm
Actief vermogen:	10,4 W	Inschakelstroom:	8 A / 50 µs



Wandmontage: Minimale verlichtingssterkte 1,0lx

	Distance to middle of escape route					
	1.0m		2.0m		3.0m	
1.0	2.6	6.3	2.4	6.1	1.1	4.7
1.5	3.2	7.7	3.1	7.7	2.5	7.0
2.0	3.6	8.8	3.6	8.9	3.2	8.5
2.5	4.0	9.7	4.0	9.9	3.7	9.6
3.0	4.3	10.5	4.3	10.7	4.2	10.5
3.5	4.5	11.1	4.5	11.4	4.3	11.2
4.0	4.6	11.7	4.7	12.0	4.5	11.9
4.5	4.8	12.2	4.8	12.5	4.7	12.4
5.0	4.8	12.6	4.9	12.9	4.8	12.9
5.5	4.9	12.9	5.0	13.2	4.8	13.2
6.0	4.9	13.1	5.0	13.5	4.9	13.5

Artikel


SN/A 6201 LED J/SV

Kleuren	DB 703	HWF 7015	RAL 7015	RAL 9016	HWF 9016	HWF (speciale)
Art. Nr.	104351889	104352091	104351687	104351586	104351990	104352192

Wandmontage


Lichtkleur: 4000 K

Bescherming: IP65



mounting adapter 6201 RAL 7015

Art. Nr. 104575292



Omschrijving	Accessoires	Art. nr.
J-ET 5.1 SV-max. 24V DC320mA const.		101422893
LM 176x20 24+9/4K KL LED Modul		104411709
mounting adapter 6201 RAL 7015	optioneel	104575292