


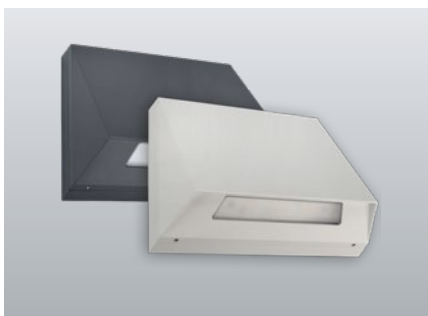


Luminaire with targeted light output. Robust trapezoidal luminaire housing for wall mounting made of powder-coated die-cast aluminium. High protection rating for outdoor installation. And optional cable entry at the side.

Technische gegevens

Materiaal:	Gepoedercoat gegoten aluminium
Lichtbron:	18 x 0,15W LED module
Lumenoutput:	358 lm
Nom. spanning AC:	230V ±10% 50/60 Hz
Nom. spanning DC:	176 - 264 V
Nom. stroom AC:	34 mA
Nom. stroom DC:	22 mA

Schijnb. vermogen:	7,8 VA
Opgen. vermogen:	5,0 W
Inschakelstroom:	6 A / 34 µs
Beschermingsklasse:	I
Rijgklem:	max. 2,5 mm ² aderdikte
Temperatuurbereik:	-15...+40 °C
Slagvastheid:	IK09



Wandmontage: Minimale verlichtingsterkte 1,0lx

	Distance to middle of escape route			Distance to middle of escape route			Distance to middle of escape route		
	1.0m			2.0m			3.0m		
1.0	2.6	6.3	2.4	6.1	1.1	4.7			
1.5	3.2	7.7	3.1	7.7	2.5	7.0			
2.0	3.6	8.8	3.6	8.9	3.2	8.5			
2.5	4.0	9.7	4.0	9.9	3.7	9.6			
3.0	4.3	10.5	4.3	10.7	4.2	10.5			
3.5	4.5	11.1	4.5	11.4	4.3	11.2			
4.0	4.6	11.7	4.7	12.0	4.5	11.9			
4.5	4.8	12.2	4.8	12.5	4.7	12.4			
5.0	4.8	12.6	4.9	12.9	4.8	12.9			
5.5	4.9	12.9	5.0	13.2	4.8	13.2			
6.0	4.9	13.1	5.0	13.5	4.9	13.5			

Artikel


SN 6201 -03 FLD 230V

Kleuren	DB 703	HWF 7015	RAL 7015	RAL 9016	HWF 9016	HWF (speciale)
Art. Nr.	104358155	104358357	104357953	104357852	104358256	104358458

Wandmontage


Lichtkleur: 3000 K

Bescherming: IP65



mounting adapter 6201 RAL 7015

Art. Nr. 104575292



Omschrijving	Accessoires	Art. nr.
FLD 230/4 - CC - 320 - L		101965083
LM 176x20 18/3K KL LED Modul		104412113
mounting adapter 6201 RAL 7015	optioneel	104575292