



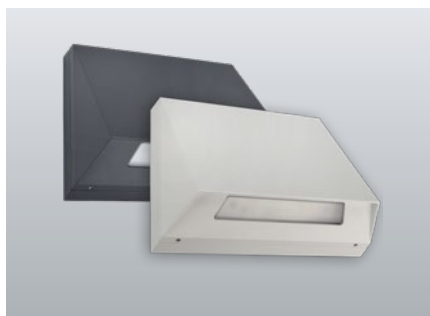

Luminaire with targeted light output. Robust trapezoidal luminaire housing for wall mounting made of powder-coated die-cast aluminium. High protection rating for outdoor installation. And optional cable entry at the side.

Technische gegevens

Materiaal:	Gepoedercoat gegoten aluminium	Opgen. vermogen:	4,2 W
Lichtbron:	18 x 0,15W LED module	Beschermingsklasse:	III
Lumenoutput:	358 lm	Rijgklem:	max. 2,5 mm ² aderdikte
Nom. spanning DC:	24 V ±25 %	Temperatuurbereik:	-15...+40 °C
Nom. stroom DC:	175 mA	Slagvastheid:	IK09



Wandmontage: Minimale verlichtingsterkte 1,0lx

Distance to middle of escape route	Distance to middle of escape route					
	1.0m		2.0m		3.0m	
1.0	2.6	6.3	2.4	6.1	1.1	4.7
1.5	3.2	7.7	3.1	7.7	2.5	7.0
2.0	3.6	8.8	3.6	8.9	3.2	8.5
2.5	4.0	9.7	4.0	9.9	3.7	9.6
3.0	4.3	10.5	4.3	10.7	4.2	10.5
3.5	4.5	11.1	4.5	11.4	4.3	11.2
4.0	4.6	11.7	4.7	12.0	4.5	11.9
4.5	4.8	12.2	4.8	12.5	4.7	12.4
5.0	4.8	12.6	4.9	12.9	4.8	12.9
5.5	4.9	12.9	5.0	13.2	4.8	13.2
6.0	4.9	13.1	5.0	13.5	4.9	13.5


Artikel

SN 6201 -03 LED 24V						
Kleuren	DB 703	HWF 7015	RAL 7015	RAL 9016	HWF 9016	HWF (speciale)
Art. Nr.	104356741	104356943	104356539	104356438	104356842	104357044

Wandmontage


Lichtkleur: 3000 K

Bescherming: IP65



mounting adapter 6201 RAL 7015

Art. Nr. 104575292



Omschrijving	Accessoires	Art. nr.
ILD 24/4-CC-320-C		101425321
LM 176x20 18/3K KL LED Modul		104412113
mounting adapter 6201 RAL 7015	optioneel	104575292