


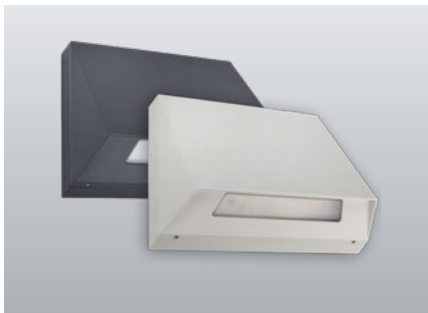


Luminaire with targeted light output. Robust trapezoidal luminaire housing for wall mounting made of powder-coated die-cast aluminium. High protection rating for outdoor installation. And optional cable entry at the side.

### Technische gegevens

|                          |                                |
|--------------------------|--------------------------------|
| <b>Materiaal:</b>        | Gepoedercoat gegoten aluminium |
| <b>Lichtbron:</b>        | 18 x 0,1W LED module           |
| <b>Lumenoutput:</b>      | 358 lm                         |
| <b>Nom. spanning AC:</b> | 230V ±10% 50/60 Hz             |
| <b>Nom. spanning DC:</b> | 176 - 264 V                    |
| <b>Nom. stroom AC:</b>   | 29 mA                          |
| <b>Nom. stroom DC:</b>   | 22 mA                          |

|                            |                                    |
|----------------------------|------------------------------------|
| <b>Schijnb. vermogen:</b>  | 6,7 VA                             |
| <b>Opgen. vermogen:</b>    | 5,6 W                              |
| <b>Inschakelstroom:</b>    | 6 A / 98 µs                        |
| <b>Beschermingsklasse:</b> | I                                  |
| <b>Rijgklem:</b>           | max. 2,5 mm <sup>2</sup> aderdikte |
| <b>Temperatuurbereik:</b>  | -15...+40 °C                       |
| <b>Slagvastheid:</b>       | IK09                               |



Wandmontage: Minimale verlichtingsterkte 1,0lx

|  | Distance to middle of escape route |     |      |      |      |     |
|--|------------------------------------|-----|------|------|------|-----|
|  | 1.0m                               |     |      | 2.0m |      |     |
|  | 1.0                                | 2.6 | 6.3  | 2.4  | 6.1  | 1.1 |
|  | 1.5                                | 3.2 | 7.7  | 3.1  | 7.7  | 2.5 |
|  | 2.0                                | 3.6 | 8.8  | 3.6  | 8.9  | 3.2 |
|  | 2.5                                | 4.0 | 9.7  | 4.0  | 9.9  | 3.7 |
|  | 3.0                                | 4.3 | 10.5 | 4.3  | 10.7 | 4.2 |
|  | 3.5                                | 4.5 | 11.1 | 4.5  | 11.4 | 4.3 |
|  | 4.0                                | 4.6 | 11.7 | 4.7  | 12.0 | 4.5 |
|  | 4.5                                | 4.8 | 12.2 | 4.8  | 12.5 | 4.7 |
|  | 5.0                                | 4.8 | 12.6 | 4.9  | 12.9 | 4.8 |
|  | 5.5                                | 4.9 | 12.9 | 5.0  | 13.2 | 4.8 |
|  | 6.0                                | 4.9 | 13.1 | 5.0  | 13.5 | 4.9 |

### Artikel


#### SN 6201 -03 LED J/SV

| Kleuren  | DB 703    | HWF 7015  | RAL 7015  | RAL 9016  | HWF 9016  | HWF (speciale) |
|----------|-----------|-----------|-----------|-----------|-----------|----------------|
| Art. Nr. | 104355327 | 104355529 | 104355125 | 104355024 | 104355428 | 104355630      |

Wandmontage


Lichtkleur: 3000 K

Bescherming: IP65



#### mounting adapter 6201 RAL 7015

Art. Nr. 104575292



| Omschrijving                        | Accessoires | Art. nr.  |
|-------------------------------------|-------------|-----------|
| J-ET 5.1 SV-max. 24V DC320mA const. |             | 101422893 |
| LM 176x20 18/3K KL LED Modul        |             | 104412113 |
| mounting adapter 6201 RAL 7015      | optioneel   | 104575292 |