


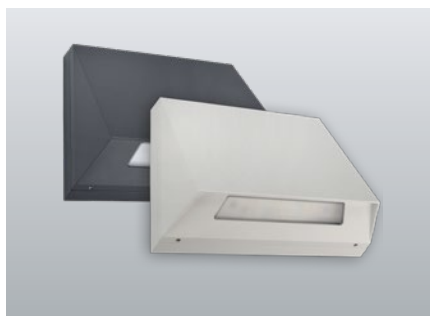


Luminaire with targeted light output. Robust trapezoidal luminaire housing for wall mounting made of powder-coated die-cast aluminium. High protection rating for outdoor installation. And optional cable entry at the side.

Technische gegevens

Materiaal:	Gepoedercoat gegoten aluminium	Schijnb. vermogen:	11,5 VA
Lichtbron:	18 x 0,3W LED module	Opgen. vermogen:	9,8 W
Lumenoutput:	687 lm	Inschakelstroom:	8 A / 50 µs
Nom. spanning AC:	230V ±10% 50/60 Hz	Beschermingsklasse:	I
Nom. spanning DC:	176 - 264 V	Rijgklem:	max. 2,5 mm ² aderdikte
Nom. stroom AC:	50 mA	Temperatuurbereik:	-15...+40 °C
Nom. stroom DC:	39 mA	Slagvastheid:	IK09

Technische gegevens (algemene verlichting)

Lumenoutput:	687 lm
---------------------	--------



Wandmontage: Minimale verlichtingsterkte 1,0lx

	Distance to middle of escape route					
	1.0m		2.0m		3.0m	
1.0	3.1	7.4	3.0	7.5	2.3	6.7
1.5	3.8	9.1	3.8	9.3	3.5	9.0
2.0	4.4	10.4	4.4	10.7	4.2	10.6
2.5	4.8	11.6	4.9	11.9	4.7	11.9
3.0	5.2	12.6	5.3	12.9	5.2	12.9
3.5	5.5	13.5	5.6	13.8	5.6	13.9
4.0	5.8	14.2	5.9	14.6	5.9	14.7
4.5	6.0	14.9	6.2	15.3	6.1	15.4
5.0	6.2	15.5	6.4	15.9	6.3	16.1
5.5	6.4	16.0	6.5	16.5	6.5	16.6
6.0	6.5	16.5	6.7	16.9	6.7	17.1


Artikel

SN 6201 -06 LED J/SV						
Kleuren	DB 703	HWF 7015	RAL 7015	RAL 9016	HWF 9016	HWF (speciale)
Art. Nr.	104359569	104359771	104359367	104359266	104359670	104359872

Wandmontage


Lichtkleur: 3000 K

Bescherming: IP65



mounting adapter 6201 RAL 7015

Art. Nr. 104575292



Omschrijving	Accessoires	Art. nr.
J-ET 7 SV - max. 12V DC650mA const		101420772
LM 176x20 18/3K KL LED Modul		104412113
mounting adapter 6201 RAL 7015	optioneel	104575292