





A diagram of a hexagonal arena. A person is running in the center. A spotlight is shining on the person from a point on the top edge of the arena.

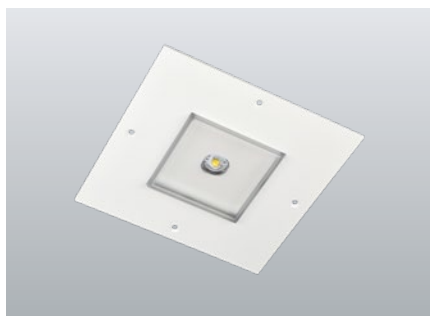

Materiaal:	Gepoedercoat staalplaat
Lichtbron:	1 x 3,5W LED module
Lumenoutput:	491 lm
Nom. spanning AC:	230V ±10% 50/60 Hz
Nom. spanning DC:	176 - 264 V
Nom. stroom AC:	25 mA
Nom. stroom DC:	25 mA

Schijnb. vermogen:	5,8 VA
Opgen. vermogen:	5,5 W
Inschakelstroom:	6 A / 22 μs
Beschermingsklasse:	III
Rijgklem:	max. 2,5 mm ² aderdikte
Temperatuurbereik:	-15...+40 °C
Slagvastheid:	IK10




Minimale verlichtingsterkte 1,0lx op
lichtoppervlak, onderhoud factor 0,8

		
5.5	6.4	15.9
6.0	6.6	16.5
6.5	6.7	17.1
7.0	6.7	17.6
7.5	6.7	18.0
8.0	6.5	18.3
8.5	6.3	18.6
9.0	5.9	18.8
9.5	5.4	19.0
10.0	4.8	19.0

 	 	 
5.5	4.7	12.9
6.0	4.9	13.6
6.5	4.9	13.7
7.0	4.9	14.7
7.5	4.8	15.4
8.0	4.8	15.8
8.5	4.7	15.9
9.0	4.6	16.2
9.5	4.5	16.6
10.0	4.2	17.0


SN 8030.2 E -12 SHB FLD 230V

Kleuren	RAL 7015	RAL 9016	RAL (speciale)
Art. Nr.	104240846	104240745	104240947



Art. Nr. 101445226

benodigd



Omschrijving	Accessoires	Art. nr.
FLD-Adresmodule 230/320 SK II ext.	benodigd	101445226
LED-Supply 230-3 J-SV SK IIext.	benodigd	101436536
LED-Supply 230-3 NE-SV SK IIext.	benodigd	101436738
LED-Supply 230-3 SK II ext.	benodigd	101436637
LED-Supply 24-3 SK III ext.	benodigd	101442091
LM 8030.2 E 1(12V)/4K SHB 24V RAL9016 LED Modul		104489511