



Double-sided aluminium profile emergency exit luminaires with additional light output at bottom side. Homogeneous illumination by state-of-the-art LED technology with a luminance of > 500 cd/m².

Technical data

Viewing distance:	20 m	Apparent power:	6,1 VA
Material:	Aluminium	Inrush current:	8 A / 50 µs
Illuminant:	2 x 1W LED-module	Protection class:	I
Nominal voltage AC:	230V AC ±10% 50/60 Hz	Input terminals:	2.5mm ² feed through wiring
Nominal current AC:	27 mA	Temperature ta:	-15...+40 °C


Available colours Add colour code to the article no. e.g. 800 014 LXX

Special colour: **L99** 🌈

Articles


SNP 7286 D LED NE/SV Art. no. 807 596

Ceiling mounting Light colour: 6500 K Protection category: IP40

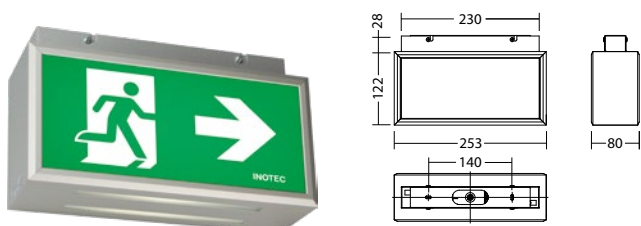


SNP 7286 K LED NE/SV Art. no. 807 597

Chain mounting Light colour: 6500 K Protection category: IP40

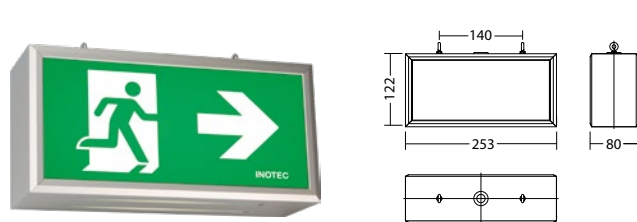


SNP 7286 P LED NE/SV Art. no. 807 598

Pendulum mounting Light colour: 6500 K Protection category: IP40

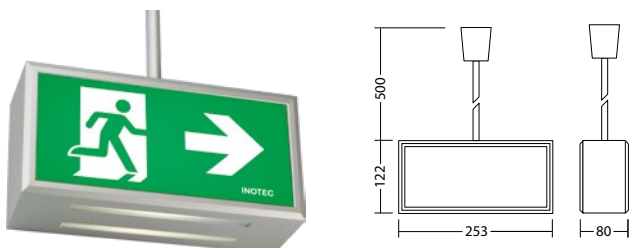

SNP 7286 WA LED NE/SV Art. no. 807 599

Wall bracket mounting Light colour: 6500 K Protection category: IP40

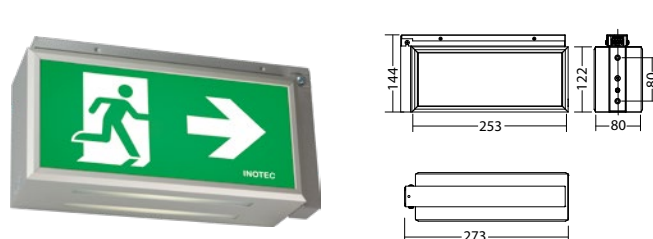

Name	Accessories	Art. no.
Pendulum SN-luminaire NE/SV 2,0 m gr	required	890 583
Pendulum SN-luminaire NE/SV 1,0 m gr	required	890 581
Pendulum SN-luminaire NE/SV 0,5 m gr	required	890 579
Pendulum SN-luminaire NE/SV 2,0 m ws	required	890 577
Pendulum SN-luminaire NE/SV 1,0 m ws	required	890 575
Pendulum SN-luminaire NE/SV 0,5 m ws	required	890 573
Legend panel 7x86 / 2420 PRO	required	714 360
Legend panel 7x86 / 2420 PLO	required	714 359
Legend panel 7x86 / 2420 PRU	required	714 358
Legend panel 7x86 / 2420 PLU	required	714 357
Legend panel 7x86 / 2420 PO	required	714 311
Legend panel 7x86 / 2420 PR	required	714 047
Legend panel 7x86 / 2420 PL	required	714 046
Legend panel 7x86 / 2420 PU	required	714 045
Blind cover 7x86 / 7x20 grey	required	704 910
Cover 7x86 opal	required	704 906

Info: When ordering an exit luminaire, the required pictogram with the corresponding arrow direction must be indicated.

For luminaires with pendulum mounting, select the desired pendulum (length and colour of baldachin).

