


230V SNP 2004.1 Polycarbonate luminaires

FLD For connection to FUSION central battery- or emergency power (NEA) systems




Versatile LED safety luminaire ideal for illumination of areas to be highlighted especially according to DIN EN 1838. Luminaire with separately switchable, backlit pictograph. UV resistant, heat filament tested polycarbonate housing for wall mounting with optional side cable entry.

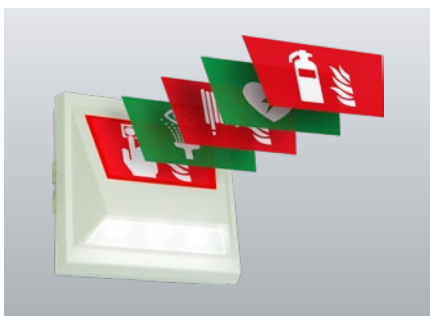

Technical data

viewing distance:	18 m
Material:	polycarbonate
Illuminant:	3 x 1W + 2 x 1W LED-module
Luminous flux:	210 lm
Nominal voltage AC:	230V ±10% 50/60 Hz
Nominal voltage DC:	176 - 264 V
Nominal current AC:	30 mA

Nominal current DC:	31 mA
Apparent power:	6,9 VA
Effective power:	6,8 W
Inrush current:	6 A / 22 µs
Protection class:	II
Input terminals:	2.5mm ² feed through wiring
Temperature ta:	-15...+40 °C



Wall mounting: Minimum illumination 1.0lx


[m]	Distance to middle of escape route					
	1.0m		2.0m		3.0m	
1.0	2.2	5.4	2.3	5.7	1.8	5.2
2.0	2.8	7.0	2.8	7.2	2.3	6.8
2.5	3.0	7.4	3.0	7.8	2.6	7.4
3.0	3.1	8.0	3.1	8.4	2.7	8.1
3.5	3.2	8.5	3.2	8.7	2.8	8.5
4.0	3.1	8.7	3.1	9.1	2.8	8.8
4.5	3.0	9.0	3.0	9.3	2.7	9.0
5.0	2.8	9.0	2.8	9.3	2.5	9.1
5.5	2.6	9.0	2.6	9.3	2.0	9.1
6.0	2.2	8.8	2.1	9.2	1.5	8.9

Articles

SNP 2004.1 FLD 230V

Colors	Polycarbonat
Art. no.	102053902


wall mounting Light colour: 6500 K Protection category: IP40



SNP 2004.1 FLD 230V

Colors	Polycarbonat
Art. no.	102054003

wall mounting Light colour: 6500 K Protection category: IP40




230V**SNP 2004.1 Polycarbonate luminaires**

For connection to FUSION central battery- or emergency power (NEA) systems

SNP 2004.1 FLD 230V


Colors	Polycarbonat
Art. no.	102053801

wall mounting Light colour: 6500 K Protection category: IP40

**SNP 2004.1 FLD 230V**


Colors	Polycarbonat
Art. no.	102053595

wall mounting Light colour: 6500 K Protection category: IP40

**SNP 2004.1 FLD 230V**


Colors	Polycarbonat
Art. no.	102053696

wall mounting Light colour: 6500 K Protection category: IP40

**SNP 2004.1 FLD 230V**

Colors	Polycarbonat
Art. no.	102053700

wall mounting Light colour: 6500 K Protection category: IP40



Name	Accessories	Art. no.
FLD 230/8 – CC – 320 – C	Ersatzteil	100903238
LM SNP 2004.1 2/6,5K KB90	Ersatzteil	104428883
LM SNP 2004.1 2/6,5K KB90	104428883	104428883