


230V

SN 6204.1 Wall, floor and stair luminaires

J/SV


For connection to JOKER-central battery systems

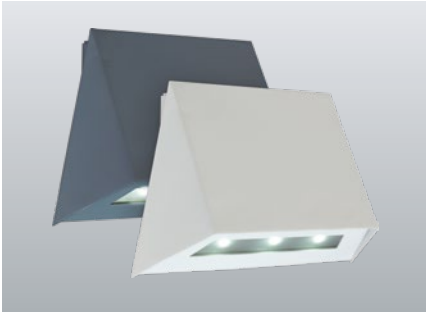

Trapezoidal LED emergency luminaires for illumination of escape routes and exit doors. Luminaires for wall mounting with elegant powder coated metal housing without any visible screws.

Technical data

Material:	sheet steel powder-coated	Apparent power:	7,1 VA
Illuminant:	3 x 1W LED-module	Effective power:	6,1 W
Luminous flux:	210 lm	Inrush current:	8 A / 50 μ s
Nominal voltage AC:	230V \pm 10% 50/60 Hz	Protection class:	I
Nominal voltage DC:	176 - 264 V	Input terminals:	2.5mm ² feed through wiring
Nominal current AC:	31 mA	Temperature ta:	-15...+40 °C
Nominal current DC:	25 mA		

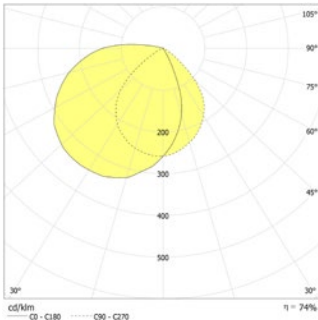

Wall mounting: Minimum illumination 1.0lx


[m]	Distance to middle of escape route					
	1.0m		2.0m		3.0m	
1.0	2.2	5.4	2.3	5.7	1.8	5.2
2.0	2.8	7.0	2.8	7.2	2.3	6.8
2.5	3.0	7.4	3.0	7.8	2.6	7.4
3.0	3.1	8.0	3.1	8.4	2.7	8.1
3.5	3.2	8.5	3.2	8.7	2.8	8.5
4.0	3.1	8.7	3.1	9.1	2.8	8.8
4.5	3.0	9.0	3.0	9.3	2.7	9.0
5.0	2.8	9.0	2.8	9.3	2.5	9.1
5.5	2.6	9.0	2.6	9.3	2.0	9.1
6.0	2.2	8.8	2.1	9.2	1.5	8.9

Articles**SN 6204.1 LED J/SV**



Colors	RAL 7015	RAL 9016	RAL (special)
Art. no.	101283861	101283760	101283962

wall mounting

Light colour: 6500 K

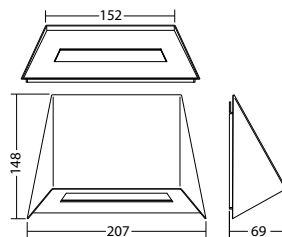Protection category:
IP40**mounting adapter SN 6204.1 IP40, RAL 9016**

Art. no. 101444317

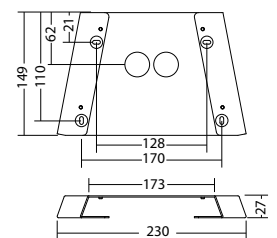

Name	Accessories	Art. no.
J - ET 9 / 24 SV -max.24VDC,320mAconst	Ersatzteil	101420267
LM 122,5x21,5 3/6,5K KB90	Ersatzteil	101451791
mounting adapter SN 6204.1 IP40, RAL 9016	optional	101444317